

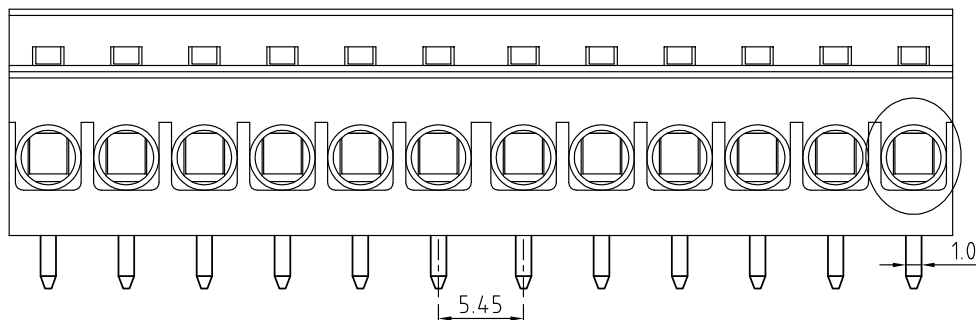
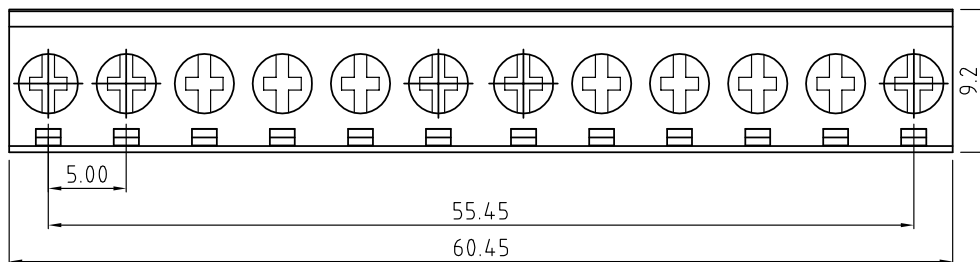




P.C.B. LAYOUT

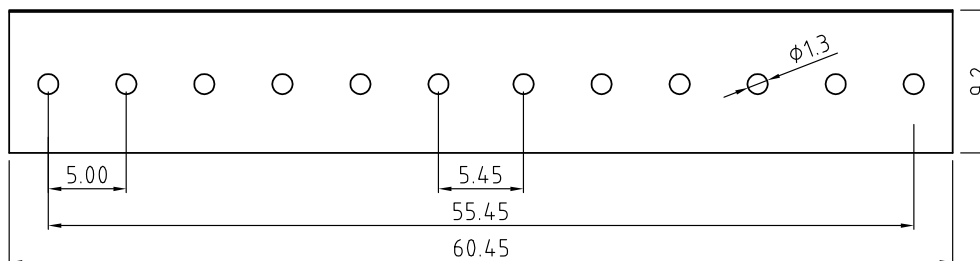

Technical Data:

Material:

Terminal: Copper Alloy Tin plated
 screw: Steel galvanized with Cr3+ plated
 Wire guard: Stainless steel
 Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 250VAC
 Current rating: 15 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 14-24AWG

Mechanical:

Torque: 4.0kgf.cm/M3
 Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

TBN050-D14BK-1267-LF

SERIES

LEADFREE

6+7 WAY PITCH 5.45mm

12 WAY

BLACK

HIGH 14.5mm

DIP 180°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com