
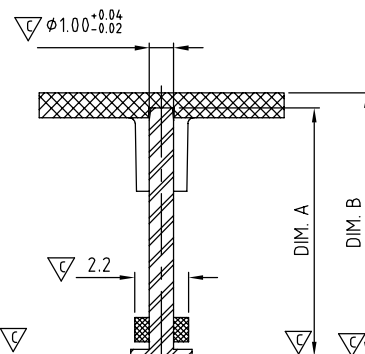
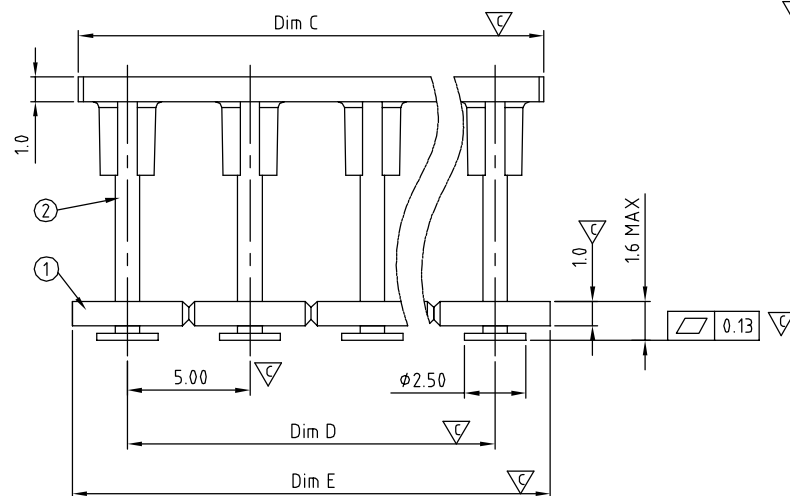


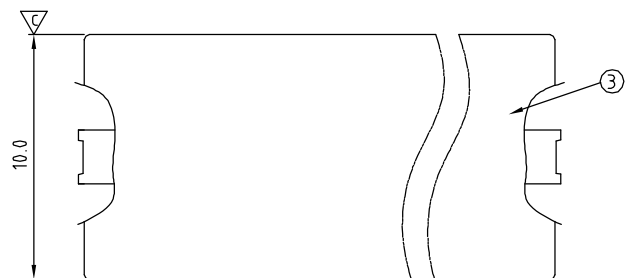

NOTE:


- Item ① Insulator(housing): High temp. polyamide(UL94V-0)
- Item ② Terminal Body: Brass,tin plated
- Item ③ Cover: High temp. polyamide(UL94V-0)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -45°C to +65°C
- Soldering temperature: 280°C/10 Sec
- Safety Approval:
- Critical dimension:

TYPE	DIM. A	DIM. B
101	10.15mm	10.75mm
104	10.40mm	11.00mm
155	15.50mm	16.10mm
142	14.20mm	14.80mm

N=Number of Poles

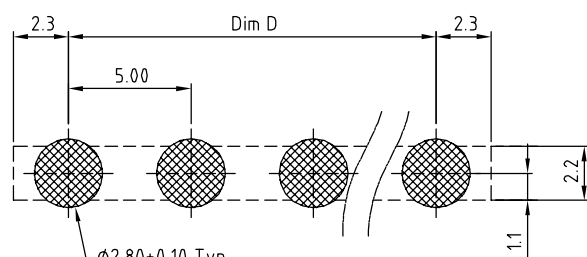

P.C.B Layout

DIM. C = N×5.0-1.0
DIM. D = (N-1)×5.0
DIM. E = N×5.0-0.5

POLES	DIM. C	DIM. D	DIM. E
2P-3P	±0.15	±0.10	±0.15
4P-7P	±0.20	±0.20	±0.20
8P-12P	±0.25	±0.25	±0.25

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

TBN050-PVxxxC-xx-LF

SERIES

LEADFREE

MALE

180°SMT

CAP

101:10.15mm

104:10.40mm

155:15.50mm

142:14.20mm

DESCRIPTION: 5.0mm Series 2P-12P