
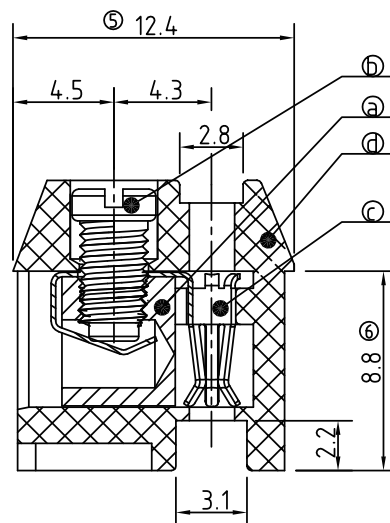
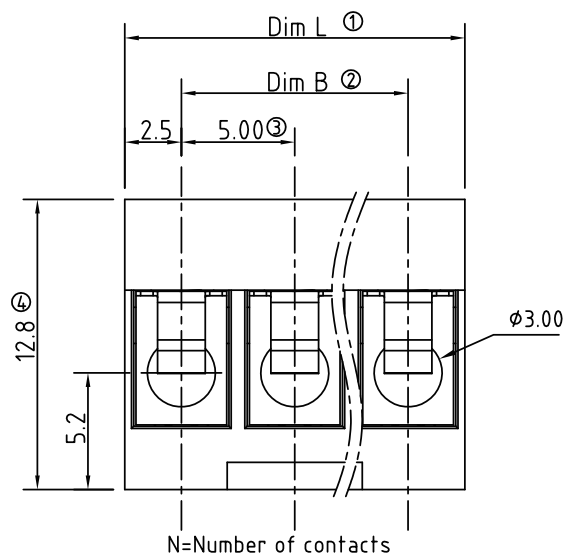


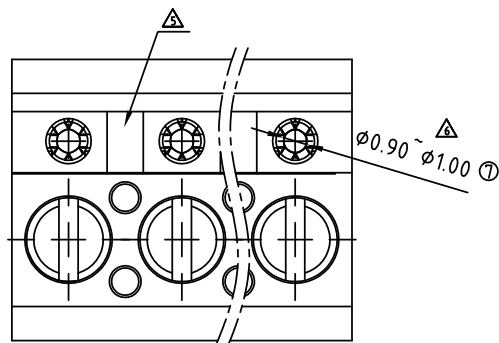

N=Number of contacts

Poles	02	03	04	05	06	07	08	09	10	11	12	
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	
TOL	±0.15				±0.25				±0.30			

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- △ ● Item c Female contact: PhBz (CuSn) Tin plated (Plating before stamping)
- Item d Terminal (housing) : Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- △ ● Solid wire(AWG): 12-26
- △ ● Stranded wire(AWG): 12-26
- Torque: 3.5Lb-In
- Screw: M3.0
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature:-40°C to+115°C
- △ ● Safety Approval: us
- Use with OP 1.3mm pin, Withdrawal force:200 - 500gf /pole

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBN050-SW12-xx-LF

SERIES

LEADFREE
02~12WAY
HIGH 12.8mm
SCREW WIRE
FEMALE

DESCRIPTION: