
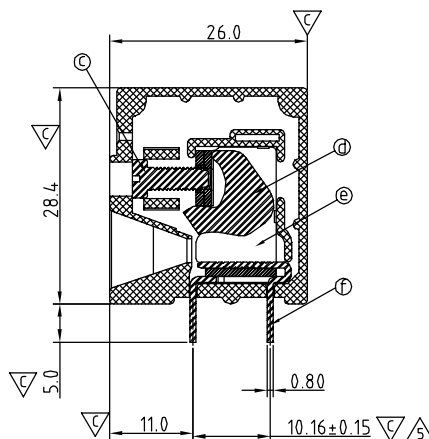
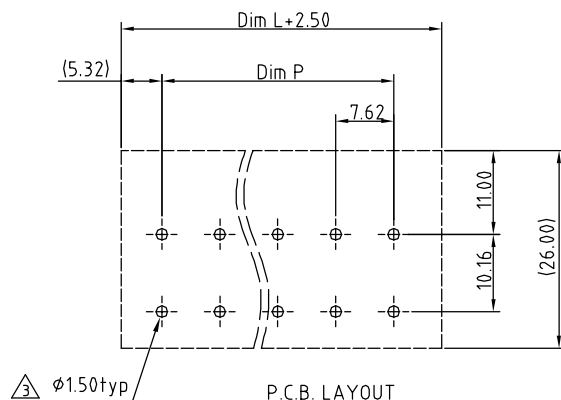
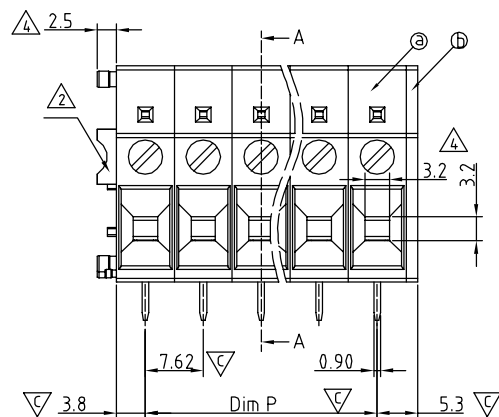


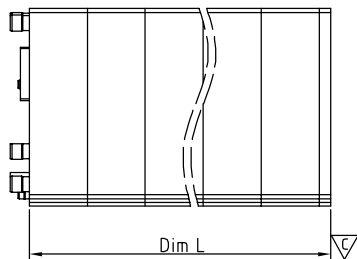

SECTION A-A

N = Number of poles
 $\text{Dim L} = N \times 7.62 + 1.5$
 $\text{Dim P} = (N - 1) \times 7.62$

	Dim L	Dim P
2-4p	± 0.25	± 0.20
5-7p	± 0.30	± 0.25
8-11p	± 0.35	± 0.30
12-16p	± 0.40	± 0.35

Material

- Item a Terminal body: Thermoplastic (UL94V-0)
- Item b Terminal cover: Thermoplastic (UL94V-0)
- Item c Terminal screw: Steel Zinc plating "-" slot type
- Item d Clampage: Steel Zinc plated
- Item e Clamp: Steel, Zinc plating
- Item f Solder pin: Copper, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 30A
- Wire range:
- Solid wire (AWG): 10-24
- Stranded wire (AWG): 10-24
- Torque (Lb-In): 4.3
- Screw: M3
- Wire strip length: 15-16mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to $+115^{\circ}\text{C}$
- Soldering temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}/5 \text{ Sec}$
- Safety Approval: 
- Critical dimension: 

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX $\pm$

ANG $\pm 1^{\circ}$

DATE

SIZE A4

PPOJECTION 

照片框

ORDER INFORMATION

TBN076-R28-xx-LF

SERIES

LEADFREE

02~16WAY

HIGH 28.4mm

DIP 90°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com