


Normal Geometric Tolerancing			
—	//	≡	⊥
0 to 100	0.2	0.5	0 to 10
over 100 to 150	0.4		over 10
over 150	0.5		0.3
Total Pitch Tolerances		Normal dimension Tolerances	
0<U≤30	±0.20	0~30	±0.25
30<U≤53	±0.25	over 30~53	±0.30
53<U≤70	±0.30	over 53~70	±0.35
70<U≤90	±0.35	over 70~90	±0.44
90<U≤115	±0.44	over 90~115	±0.55
115<U≤150	±0.55	over 115~150	±0.70
150<U≤200	±0.70	over 150~200	±0.85
200<U≤250	±0.85	over 200~250	±1.00
250<U≤320	±1.00	over 250~320	±1.20

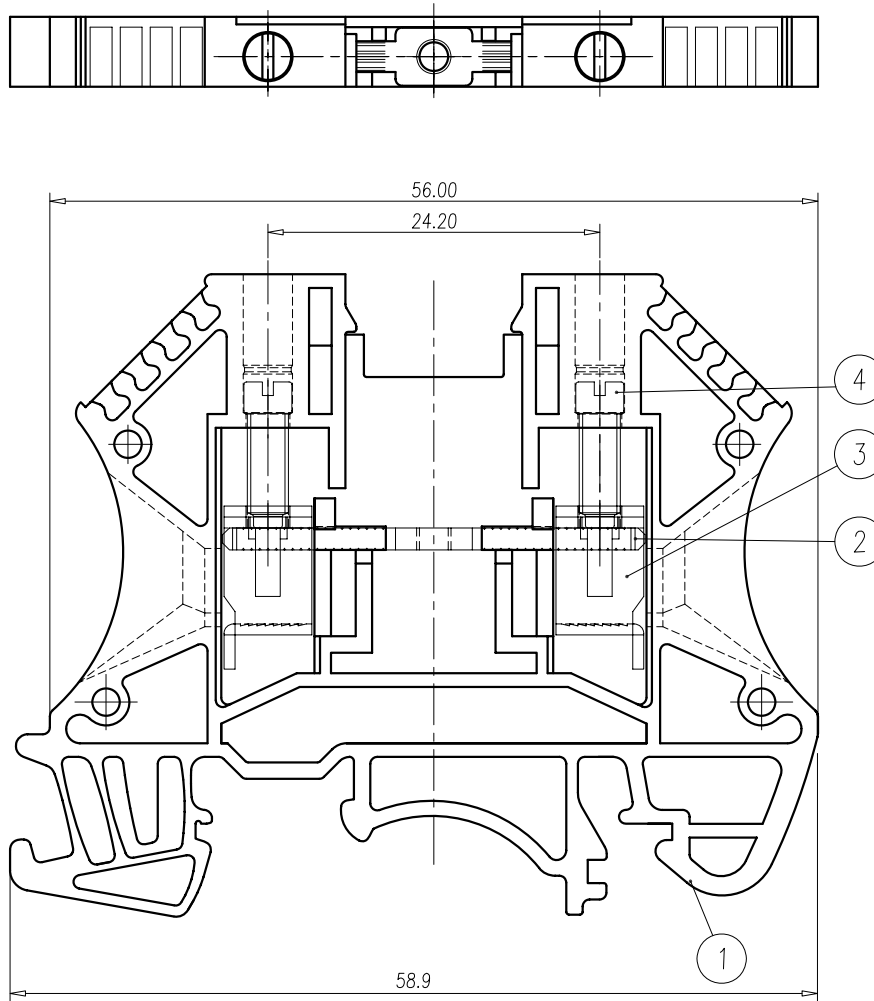

NOTES:

- Rating: UL 600V 25A
IEC 630V 24A
- Insulation Withstands Voltage:
AC 2000V at 1 minute
- Insulation Resistance:
500MΩ or more at DC1000V
- Using Temperature Range:
-40°C~+105°C
- Screw Torque Value: 8 kgf-cm
- Suitable Electric Wire: AWG 22~12 (IEC 2.5mm²)
- RoHS compliance

ITEM	NAME OF PART	MATERIAL	NOTES
4	SCREW	STEEL	Zn Plated
3	WIRE CAGE	STEEL	Zn Plated
2	CONDUCTOR	COPPER ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PPOJECTION

照片框

ORDER INFORMATION

TBR051-W-01-LF

SERIES | LEADFREE
| 01 WAY
SCREW WIRE

DESCRIPTION: