
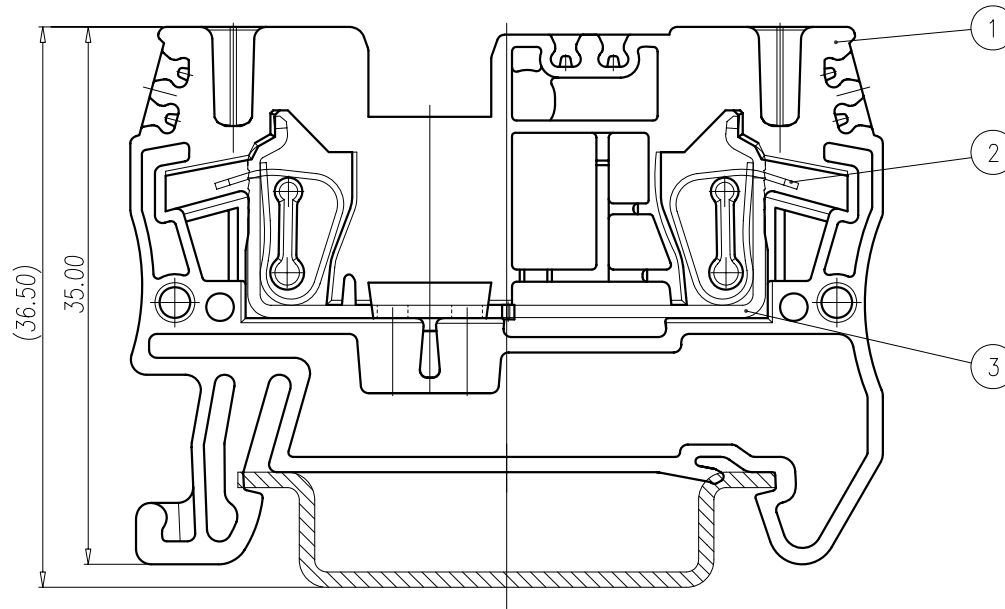


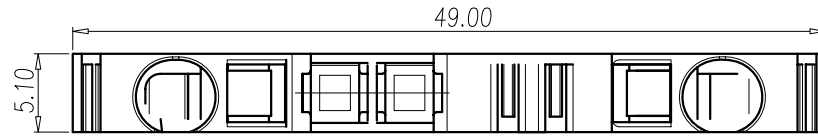

NOTES:

1. Rating: UL 600V 20A
IEC 800V 24A
2. Insulation Withstands Voltage:
AC 2500V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
6. Suitable Electric Wire: AWG 30~12
(0.2~2.5mm²)
7. RoHS compliance

Normal Geometric Tolerancing					
— //		≡	⊥		
0 to 100	0.2	0.3	0 to 10	0.2	
over 100 to 150	0.3		over 10	0.3	
over 150	0.5				
Total Pitch Tolerances		Normal dimension Tolerances			
0<U≤=30	±0.20		0~30	±0.25	
30<U≤=53	±0.25		over 30~53	±0.30	
53<U≤=70	±0.30		over 53~70	±0.35	
70<U≤=90	±0.35		over 70~90	±0.44	

3	CONDUCTOR	COPPER-ALLOY	Tin Plated
2	CAGE CLAMP	SPRING STEEL	
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBR051-W3649-01-LF

SERIES

LEADFREE

01 WAY

WIDTH 49.0mm

HIGH 36.5mm

SCREW WIRE

DESCRIPTION: