


SPECIFICATIONS

Rated: 15A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 500MΩ or More at DC500v
 Screw Torque Value: 12 Kg-cm
 Wire Range Awg: 14 - 22 STR
 Terminals: Brass, Tin Plated 0.8t
 Terminal Screws: M3.5 Nickel Plated Brass

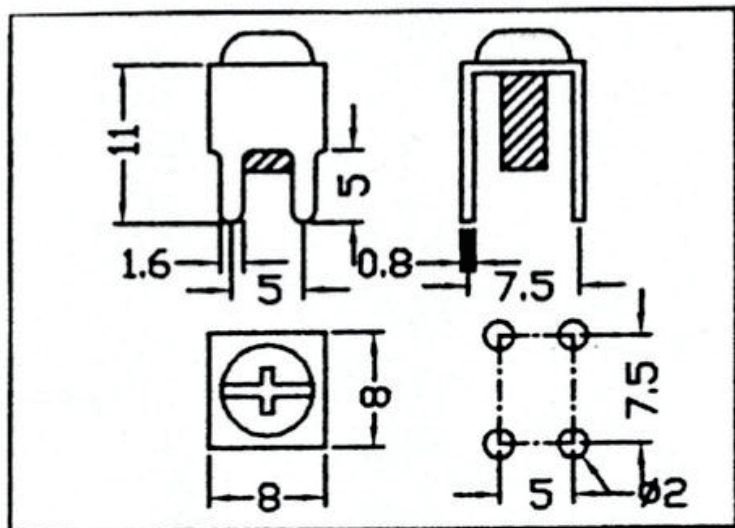

TBS-DM35J-5X7-LF
 LEADFREE
 RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. TBS-DM35J-5X7
 DWG NO. TBS-DM35J-5X7
 FILE NO.
 UNIT / mm SCALE 1:1

CHECKED BY CY
 DRAWING BY
 PROJECTION

TOLERANCES ARE
 X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG

DESCRIPTION:			
AREA	REVISIONS	DATE	

煜倫股份有限公司

J
I
H
G
F
E
D
C
B
A