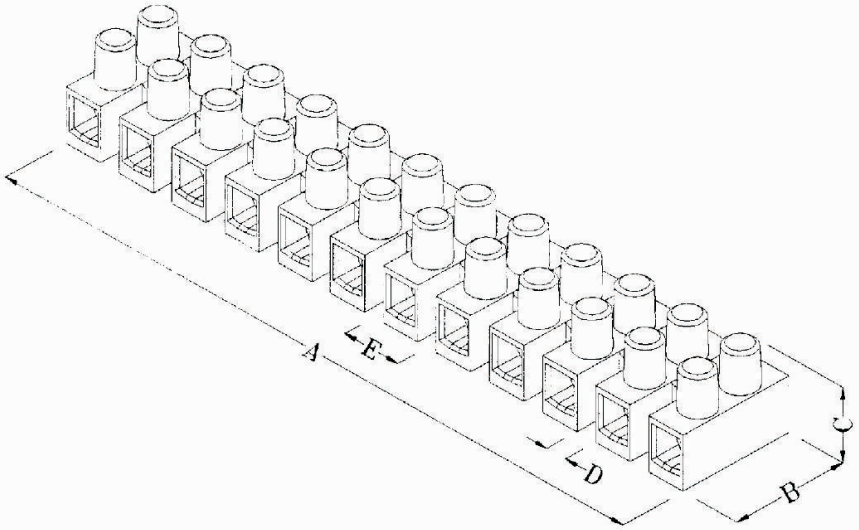

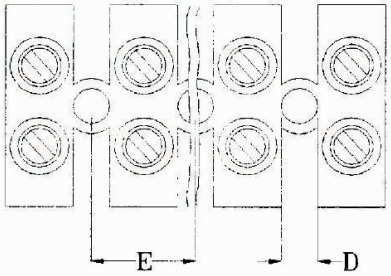

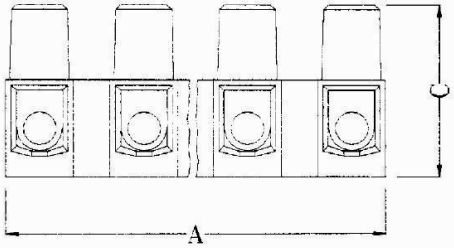



ITEM NO	Barehole for clamping area	SCREW	A	B	C	D	E
TBT080-W-12	3.0	2.6X5	93.5	17.5	15.5	3	8
TBT080-WP-12 (Wire protector)	3.0	2.6X5	93.5	17.5	15.5	3	8

SPECIFICATION

Voltage rating: 380V AC
Rating capacity: 5A to 26A
Temperature limit: short time 140 ℃~160 ℃
continuous 80 ℃~105 ℃
cold resistant -40 ℃
Resistance to tracking: KB>600
Safety standard approval:
UL, VDE, SEMKO, DEMKO, SETI, SEV, OVE, CB

MATERIAL

Molding: Polyamide PA6/6, natural color
Inserts: Nicked-plated brass
Wire protector: Stainless spring steel
Screw: Zinc plated steel, yellow chromated

NUMBER OF WIRES APPLIED

ITEM No.	0.75mm²	1mm²	1.5mm²	2.5mm²	4mm²	6mm²
TBT080-W-12	10	6	4	2	2	
TBT080-WP-12	10	6	4	2	2	

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm | SCALE 1 : 1
DATE
SIZE A4 PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBT080-Wx-12-LF
SERIES
LEADFREE
12WAY
BLANK:STANDARD
P:WIRE/PROTECTOR
WIRE TO WIRE

DESCRIPTION: