




- ◆ High grade flexible strips
- ◆ Raised base
- ◆ 2 to 12 pole available
- ◆ Male and female strips as one set
- ◆ Pluggable connector with excellent electrical contact
- ◆ Vertical / horizontal mounting
- ◆ Natural color as standard

**Type No.**



TBT120-SU-xx    TBT120-PW-xx  
TBT120-SW-xx

**Technical Data**


Housing	Polyamide 6/6 94-V2 grade	
Insert	brass, nickel plated	
Screw	M3x5.4	M3.5x7.2
	zinc plated steel yellow chromated	
Temperature working	-40°C to 100°C	
short time	140°C	
Voltage (V)	450	450
Ampere (A)	6	10
Cross section (mm <sup>2</sup> )	2.5	4



TBT120-SU-xx

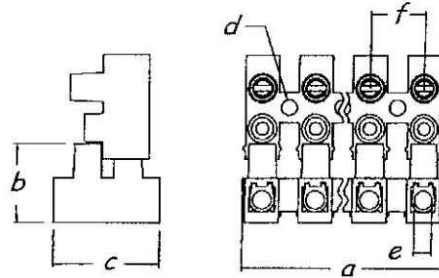

TBT120-PW-xx



TBT120-SW-xx

TBT120-P+S-xx-LF  
LEADFREE

**Type No.**

TBT120-SU-xx    TBT120-PW-xx  
TBT120-SW-xx

**Dimension (mm)**

a) Length	116.5	139.5
b) Height	15.3	18.0
c) Width	20.5	23.5
d) Fixing hole	3.0	3.5
e) Wiring hole	3.2	4.2
f) Pitch	10.0	12.0



PART NO. TBT120-P+S-xx

RoHS Compliant

DWG NO. TBT120-P+S-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ±  
.XX ±  
.XXX ±  
AWG

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------