

端子台(平底型)

Terminal Block (Flat Base Type)

- 底座：平底。
- 膠殼：尼龍66工程塑料，UL 94V-2阻燃等級。
- 溫度：105°C (UL)，-30°C to T110°C (VDE)。
- 彈片：不鏽鋼材質，PA9DS附加彈片。
- 螺絲：鍍鋅白鐵。
- 剝線長度：約6.5 mm (公分) / 0.26 inch (英吋)。
- 接線排數：12排。







TBTxxx-Wx-12-LF
LEADFREE
P: WIRE PROTECTOR
080: 8.0mm
100: 10.0mm

RoHS Compliant

安規認證 (Approvals) :

型號 Model	美國 UL US	德國 DVE	芬蘭 FI	中國 COC
TBT080	600V 20A #12-#22	450V 17.5A 1.5 mm ²	450V 17.5A 1.5 mm ²	450V 17.5A 1.5 mm ²
TBT100	600V 30A #12-#22	450V 24A 2.5 mm ²	450V 24A 2.5 mm ²	450V 24A 2.5 mm ²

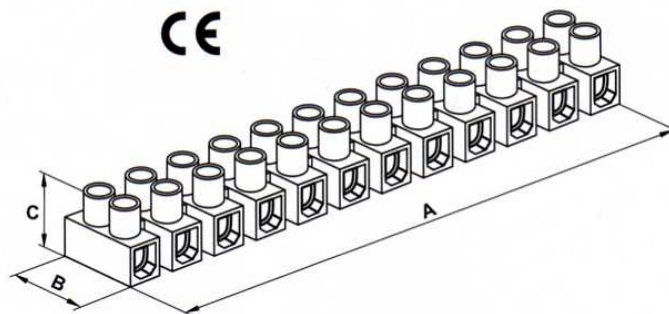

規格尺寸 (Dimensions) :

型號 Model	適用電線 / Wire Range		螺絲 Screw	尺寸 / Dimensions (mm)						包裝單位 Packing
	Cross-Sec.	(Cu, AWG)		A	B	C	D	E	F	
TBT080-W-12	1.5 mm ²	22-12 Sol/Str	M2.6x6	96.00	17.00	13.50	8.20	2.90	2.8±0.1	50 Pcs/Bag 500 Pcs/Ctn
TBT080-WP-12	1.5 mm ²	22-12 Sol/Str	M2.6x6	96.00	17.00	13.50	8.20	2.90	2.8±0.1	50 Pcs/Bag 500 Pcs/Ctn
TBT100-W-12	2.5 mm ²	22-12 Sol/Str	M3.0x7	116.8	20.20	16.20	10.00	3.60	3.4±0.1	50 Pcs/Bag 500 Pcs/Ctn
TBT100-WP-12	2.5 mm ²	22-12 Sol/Str	M3.0x7	116.8	20.20	16.20	10.00	3.60	3.4±0.1	50 Pcs/Bag 500 Pcs/Ctn

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. TBTxxx-Wx-12

DWG NO. TBTxxx-Wx-12


FILE NO.

UNIT / mm

SCALE 1:1

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE