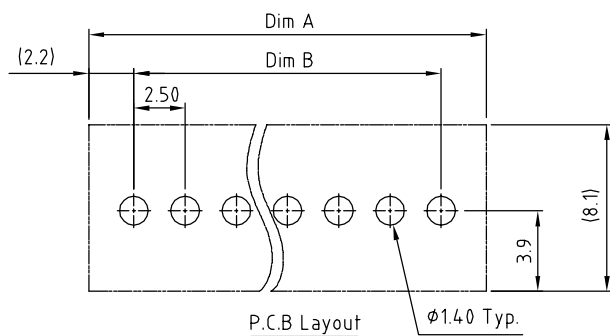
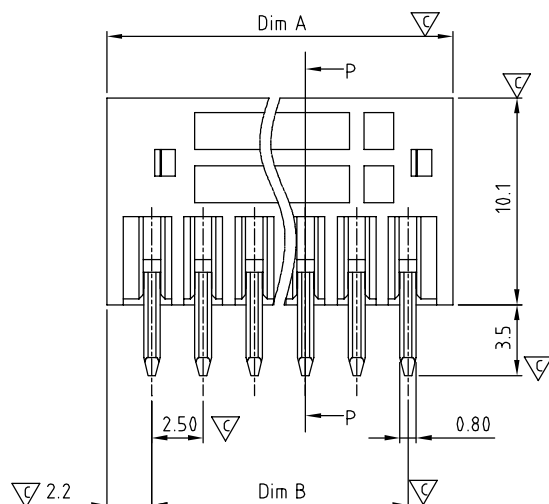
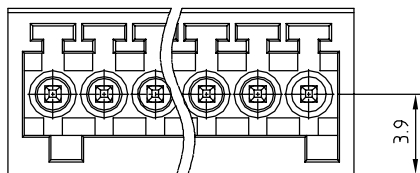


Material:

- Item ③ Male contact pin: Copper Tin plated
- Item ④ Terminal(housing): High temp. polyamide (UL94V-0)

Electrical:

cULus

- Voltage rating: 150V
- Current rating: 4A
- Withstanding Voltage: 1.3KV
- Operating temperature: -45°C to +65°C
- Soldering temperature: 280°C/10 Sec
- Safety Approval: (us) pending
- Critical dimension: ∇

Dimension

Dim A	$N \times 2.5 + 1.9$
Dim B	$(N-1) \times 2.5$

N=Number of poles

Poles	Tolerance
2p-6p	± 0.10
7p-12p	± 0.15
13p-16p	± 0.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.10

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TBX025-PDBN9T-xx-LF

SERIES

LEADFREE

02~24WAY

NYLON 9T

BOX

DIP 180°

MALE

DESCRIPTION: