


P	2	3	4	5	6	7	8	9	10	11	12	13
A	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
B	8.50	12.00	15.50	19.00	22.50	26.00	29.50	33.00	36.50	40.00	43.50	47.00
P	14	15	16	17	18	19	20	21	22	23	24	
A	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	
B	50.50	54.00	57.50	61.00	64.50	68.00	71.50	75.00	78.50	82.00	85.50	

Total Pitch Tolerances	Normal dimension Tolerances
0~30 ±0.20	0~30 ±0.25
over 30~53 ±0.25	over 30~53 ±0.30
over 53~70 ±0.30	over 53~70 ±0.35
over 70~90 ±0.35	over 70~90 ±0.44
over 90~115 ±0.44	over 90~115 ±0.55
over 115~150 ±0.55	over 115~150 ±0.70
over 150~200 ±0.70	over 150~200 ±0.85
over 200~250 ±0.85	over 200~250 ±1.00
over 250~320 ±1.00	over 250~320 ±1.20

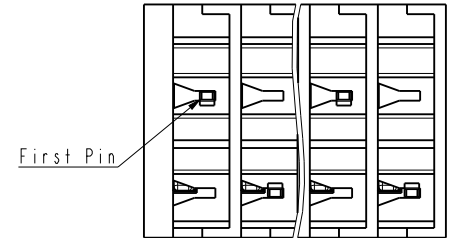

ITEM	NAME OF PART	MATERIAL	NOTES
5	LEVER	PA66	UL94-V0
4	HOUSING	PA66	UL94-V0
3	COVER	PA66	UL94-V0
2	CLAMP	COPPER ALLOY	Tin Plated
1	CLAMP	COPPER ALLOY	Tin Plated

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司  
www.morethanall.com

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/mm SCALE 1:1  
DATE  
SIZE A4 PPROJECTION

X.±  
.X±  
.XX±  
.XXX±  
ANG±



ORDER INFORMATION

TBX035-A13L-xx-LF  
SERIES  
LEADFREE  
02~24 WAY  
L TYPE FOOT  
HIGH 13.0mm  
SLANT DIP

DESCRIPTION: