

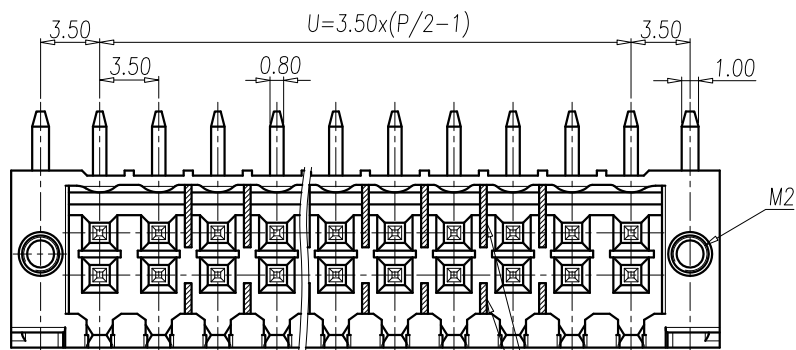


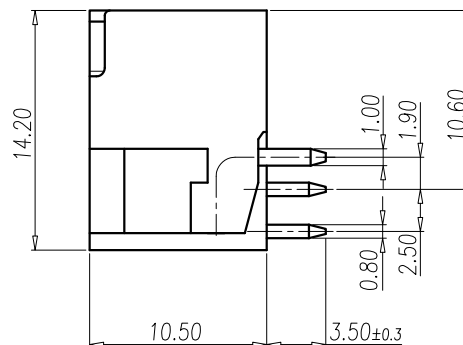

阴影肋的数量表

P	4	6	8	10	12	14	16	18	20	22
肋数量	4-18P之间都有肋									7 8
P	24	26	28	30	32	34	36	38	40	
肋数量	7	8	7	8	7	8	9	10	11	

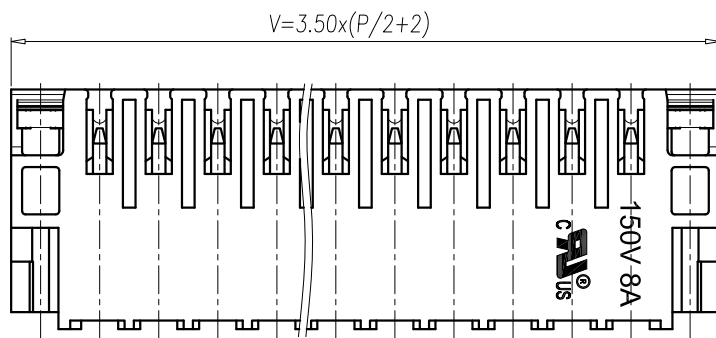


NOTES 1:

UL Standard :

1. Rating: 150V 8A
2. Insulation Withstands Voltage: AC 2000V at 1 minute
3. Using Temperature Range: -40°C~+115°C

IEC Standard :

1. Rating: 320V 10A
2. Rate Impulse Voltage: 2500V
3. Insulation Resistance: 500MΩ or more at DC500V
4. Material Group : I
5. Pollution Degree : 2
6. Overvoltage Category: II
7. Using Temperature Range: -40°C~+110°C

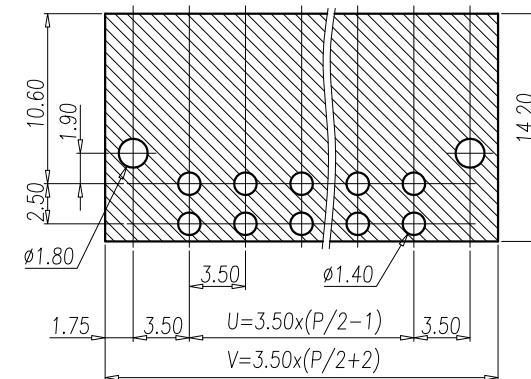

P.C.B. LAYOUT

P	4	6	8	10	12	14	16	18	20	22
U	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0
V	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0	45.5
P	24	26	28	30	32	34	36	38	40	
U	38.5	42.0	45.5	49.0	52.5	56.0	59.5	63.0	66.5	
V	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	

5	NUT	STEEL	M2/Zn Plated
4	SOLDER PIN 3	COPPER ALLOY	Tin Plated
3	SOLDER PIN 2	COPPER ALLOY	Tin Plated
2	SOLDER PIN 1	COPPER ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX035-PRFHBK-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X20:40WAY

MALE
DIP 90°

BLACK
HOOK
FLANGE

DESCRIPTION: