

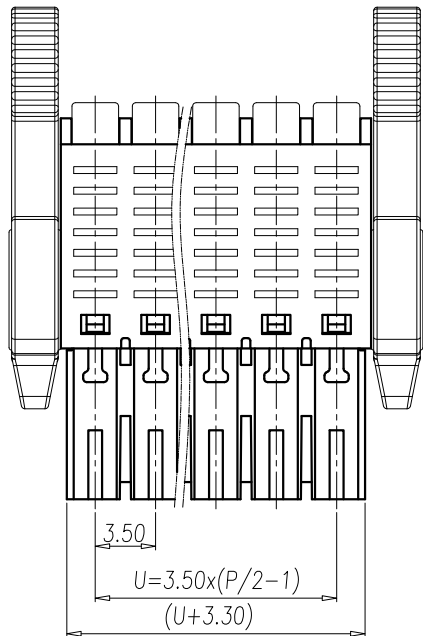


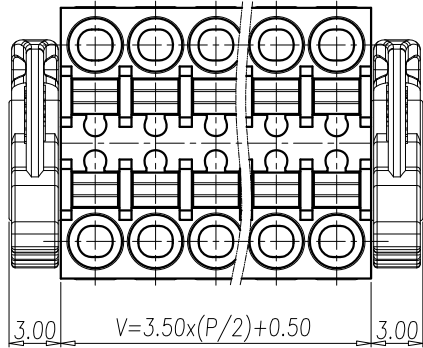

	P 4	6	8	10	12	14	16	18	20	22
U	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0
V	7.5	11.0	14.5	18.0	21.5	25.0	28.5	32.0	35.5	39.0
	P 24	26	28	30	32	34	36	38	40	
U	38.5	42.0	45.5	49.0	52.5	56.0	59.5	63.0	66.5	
V	42.5	46.0	49.5	53.0	56.5	60.0	63.5	67.0	70.5	

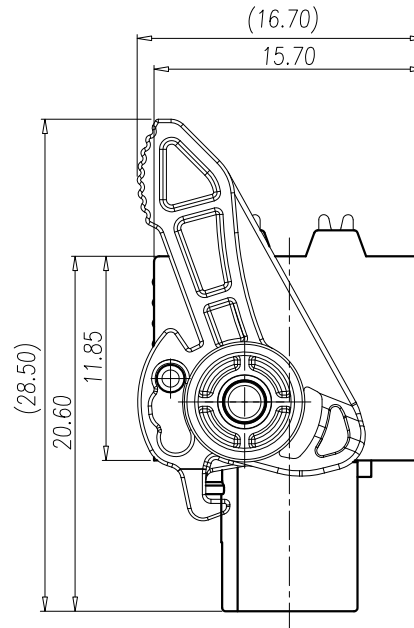

NOTES 1:

UL Standard :

- Rating: 150V 8A
- Insulation Withstands Voltage:
AC 2000V at 1 minute
- Using Temperature Range:
-40°C~+115°C
- Suitable Electric Wire: 28 ~ 16 AWG

IEC Standard:

- Rating: 320V 10A
- Rate Impulse Voltage: 2500V
- Insulation Resistance:
500MΩ or more at DC500V
- Material Group: I
- Pollution Degree: 2
- Overvoltage Category: II
- Using Temperature Range:
-40°C~+110°C
- Suitable Electric Wire:
Rigid: 0.2~1.0mm²
Flexibly: 0.2~1.5mm²

NOTES 2:

- RoHS compliance
- Strip Length: 7~8mm

6	HANDLE	POM	ORANGE
5	LEVER	POM	ORANGE
4	WIRE CAGE	STEEL	
3	SOLDER PIN	COPPER ALLOY	Tin Plated
2	COVER	PA	UI94-V0 BLACK
1	HOUSING	PA	UI94-V0 BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBX035-SVFHBK-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X20:40WAY

FEMALE
SCREW 180°

BLACK
HOOK
FLANGE

DESCRIPTION: