

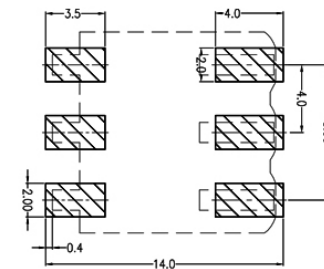
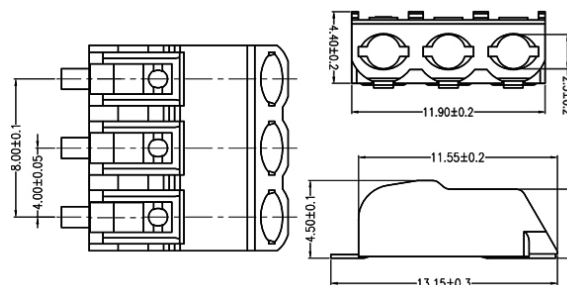
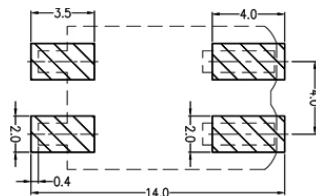


Board Layout



Board Layout



Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

TBX040-W04-xx-LF

SERIES

LEADFREE

01.02.03 WAY

HIGH 4.5mm

90°SMT

DESCRIPTION:

www.morethanall.com

产品规格					
产品型号	尺寸规格	间距	极数	重量	包装规格
TBX040-W04-02	L13.15mm*W3.9mm*H4.5mm	4mm	1P	0.2g	1500PCS/卷
TBX040-W04-02	L13.15mm*W7.9mm*H4.5mm	4mm	2P	0.45g	1000PCS/卷
TBX040-W04-02	L13.15mm*W11.9mm*H4.5mm	4mm	3P	0.7g	800PCS/卷
产品材质					
绝缘材质	PA9T				
触点材质	磷铜				
表面处理	镍底雾面锡				
触点材质	镍底雾面锡				
污染等级	III				
电气参数			使用线径		
额定电流	6A	连接方式	CAGE CLAMP(笼夹)		
额定电压	250V	使用线径	24-18AWG/0.2-0.75mm		
耐电压	800V AC/minute	单股导线	24-18AWG/0.2-0.75mm		
接触电阻	≤20MΩ	多股导线	24-18AWG/0.2-0.75mm		
绝缘电阻	≥800MΩ	剥线长度	6-9mm		
连接方式	CAGE CLAMP(笼夹)	拔插力	1.5kgf		
MJ2060 其他参数					
安装方式	SMT 表面贴装				
焊接方式	回流焊				
工作温度	-40°C to +110°C				
回流焊最高温度	270°C				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

TBX040-W04-xx-LF

SERIES

LEADFREE

01.02.03 WAY

HIGH 4.5mm

90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: