
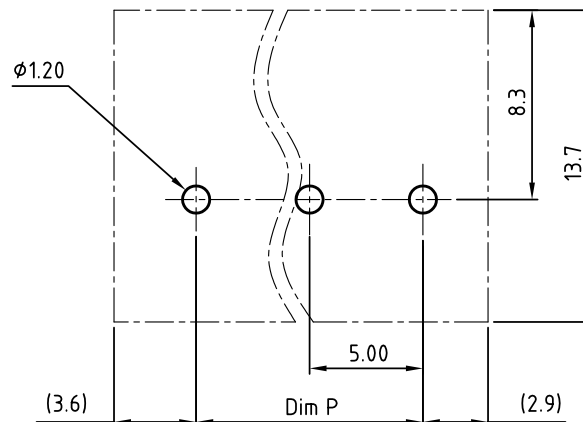



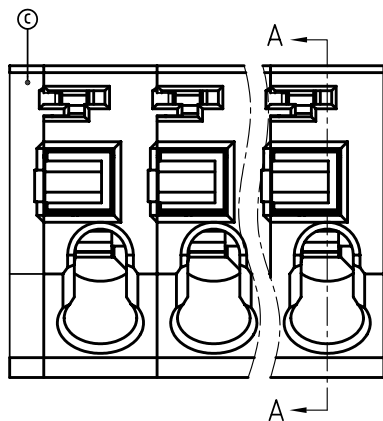


Material:

- Item a Terminal lever: Thermoplastic (UL94 V-0)
- Item b Terminal body: Thermoplastic (UL94 V-0)
- Item c Terminal cover: Thermoplastic (UL94 V-0)
- Item d Solder pin: Brass Tin plated
- Item e Spring clamp: Stainless steel

Electrical cULus

- Voltage rating: 300V
- Current rating: 10A
- Solid wire(AWG): 16-20
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

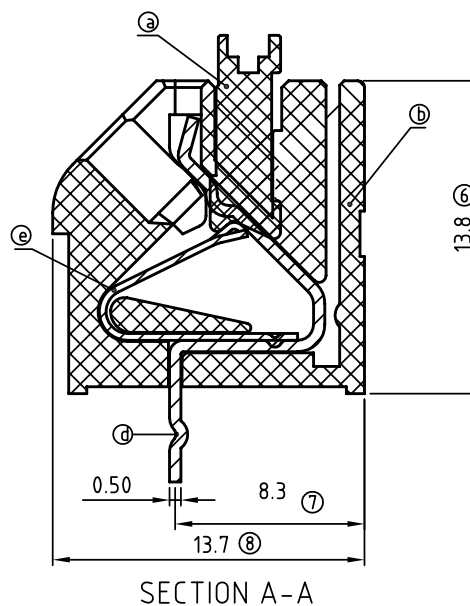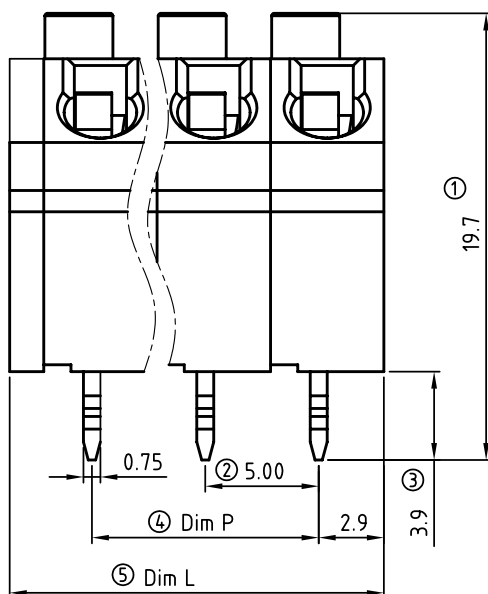

N = Number of poles

Dim L=Nx5.0+1.5

Dim P=(N-1)x5.0

	Dim L	Dim P	△
1-6p	±0.15	±0.15	
7-12p	±0.25	±0.25	
13-18p	±0.30	±0.30	
19-24p	±0.40	±0.40	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.10

.XXX, ±

ANG ± 1°

PPOJECTION 

照片框

ORDER INFORMATION

TBX050-A16A-xx-LF

SERIES | LEADFREE
01~24WAY
SINGLE ROW
HIGH 15.8mm
SLANT DIP

DESCRIPTION: