


Current rating : 16Amp AC300V  
 Insulation withstands volt : AC2000V min  
 Insulation resistance : >2000MΩ DC500V  
 Operation temperature : -40°C to +105°C  
 Wire range : 14~28 AWG

**PCB Layout**

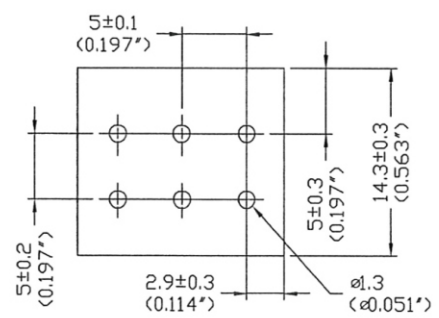

Pitch : 5.00mm(0.197inch)

Poles	A(mm)	A(inch)	Poles	A(mm)	A(inch)
2	11.00	0.433	15	76.00	2.992
3	16.00	0.630	16	81.00	3.189
4	21.00	0.827	17	86.00	3.386
5	26.00	1.024	18	91.00	3.583
6	31.00	1.220	19	96.00	3.780
7	36.00	1.417	20	101.00	3.976
8	41.00	1.614	21	106.00	4.173
9	46.00	1.811	22	111.00	4.370
10	51.00	2.008	23	116.00	4.567
11	56.00	2.205	24	121.00	4.764
12	61.00	2.402	25	126.00	4.961
13	66.00	2.598			
14	71.00	2.795			

**RoHS Compliant**

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
**煜倫股份有限公司**  
 www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PPROJECTION

TOLERANCES ARE  
 X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



**ORDER INFORMATION**

TBX050-A18-xx-LF  
 SERIES | LEADFREE  
 02-25WAY  
 HIGH 18.6mm  
 SLANT DIP

DESCRIPTION: