


- ▲ Material:
- Item ① Lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)
  - Item ② Terminal body: Thermoplastic (UL94V-0)
  - Item ③ cover: Thermoplastic (UL94V-0)
  - Item ④ Spring clamp: Stainless steel
  - Item ⑤ contact pin: Brass.Tin plated

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm<sup>2</sup>
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- ▲ ● Critical dimension:

▲ N = Number of poles  
 Dim L = N x 5.0 + 2.54  
 Dim P = (N - 1) x 5.0

| POLES  | Dim L | Dim P |
|--------|-------|-------|
| 1p     | ±0.10 |       |
| 2-6p   | ±0.15 | ±0.10 |
| 7-12p  | ±0.20 | ±0.20 |
| 13-18p | ±0.30 | ±0.25 |
| 19-24p | ±0.40 | ±0.30 |

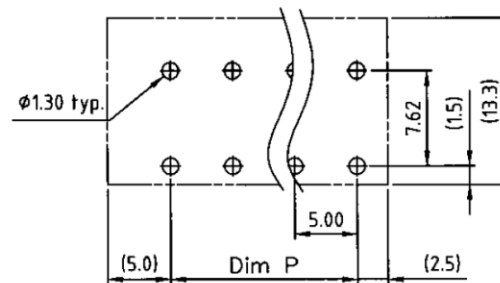

▲ P.C.B. LAYOUT  
 Bottom view

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ± 1°

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

TBX050-D14-xx-LF

SERIES | | LEADFREE  
 | | 01-24 WAY  
 | | HIGH 14.2mm  
 | | DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: