




- Material:
- Item ① Lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)
 - Item ② Terminal body: Thermoplastic (UL94V-0)
 - Item ③ cover: Thermoplastic (UL94V-0)
 - Item ④ Spring clamp: Stainless steel
 - Item ⑤ contact pin: Brass.Tin plated
- Electrical cULus/VDE
- Voltage rating: 300VAC/250VAC
 - Current rating: 10A/10A
 - Wire range: 0.75-1.5mm²
 - Solid wire(AWG): 14-24
 - Stranded wire(AWG): 14-24
 - Wire strip length: 9-10mm
 - Withstanding Voltage: 1.6KV/2KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval:  

△ N = Number of poles
 Dim L = N x 5.0 + 2.54
 Dim P = (N - 1) x 5.0

POLES	Dim L	Dim P
1p	±0.10	
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

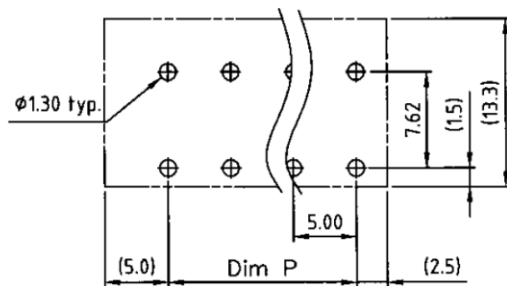

△ P.C.B. LAYOUT
 Bottom view

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.50

.X, ± 0.30

.XX, ± 0.10

.XXX, ±

ANG ± 1°

PJECTION 

照片框

ORDER INFORMATION

TBX050-D14B-xx-LF

SERIES

LEADFREE

02-24 WAY

TWO LEG

HIGH 14.0mm

DIP 180°

DESCRIPTION: