
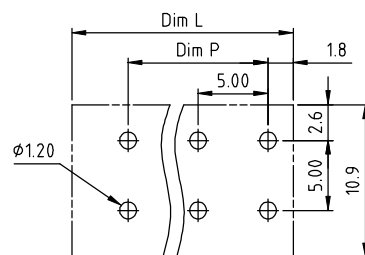

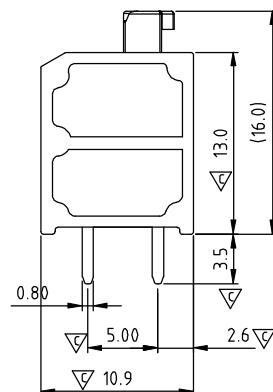
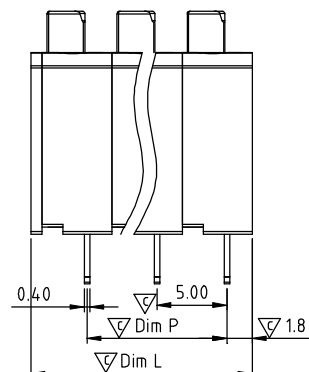



The color of lever is consistent with body's



P.C.B. LAYOUT
Top view

Material

- Item ① Insulating body Thermoplastic (UL94V-0)
- Item ② Insulating lever Thermoplastic (UL94V-0)
- Item ③ Contact pin Brass, Tin plated
- Item ④ Spring clamp Stainless steel
- Item ⑤ Insulating side body Thermoplastic (UL94V-0)
- Item ⑥ Insulating cover Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC cULus 250VAC VDE
- Current rating: 10A 10A
- Wire range: 16-20 0.5-1.0mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV 2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▽

N=NUMBER OF POLES

Dim L	N×5.0+0.80
Dim P	(N-1)×5.0

POLES	Dim L	Dim P
1p	±0.1	±0.1
2p-6p	±0.15	±0.15
7p-12p	±0.2	±0.2
13p-18p	±0.3	±0.3
19p-24p	±0.4	±0.4

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

TBX050-D15B-xx-LF

SERIES

LEADFREE
02-24WAY
TWO LEG
HIGH 16.0mm
DIP180°

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com