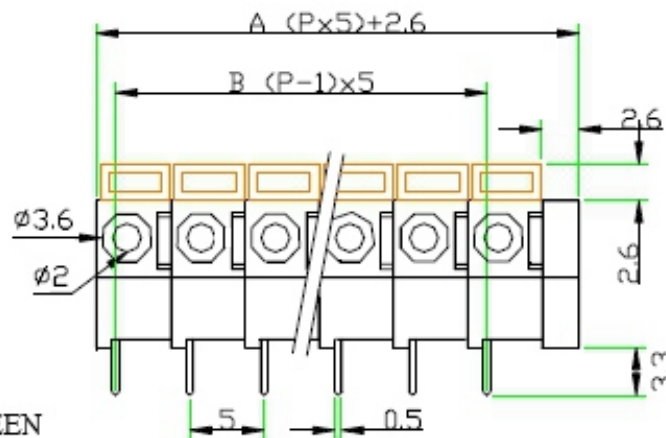


### SPECIFICATIONS

**BODY MATERIAL:** THERMOPLASTIC (UL 94V-0), GREEN

**TERMINALS:** TIN PLATED BRASS

**LEVER:** THERMOPLASTIC (UL 94V-0).ORANGE

**WIRE RANGE AWG:** 18-22 STR.

**RATING:** 10 AMPERES, 300 VAC

**INSULATION WITHSTANDS VOLTAGE** AC 2000V/MIN

**INSULATION RESISTANCE** 500M<sub>Ω</sub> [OR MORE AT DC 500V]

| POLE | 2    | 3    | 4    | 5    | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 15    |       |
|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A    | 12.6 | 17.6 | 22.6 | 27.6 | 32.6  | 37.6  | 42.6  | 47.6  | 52.6  | 57.6  | 62.6  | 67.6  | 72.6  | 77.6  |       |
| B    | 5    | 10   | 15   | 20   | 25    | 30    | 35    | 40    | 45    | 50    | 55    | 60    | 65    | 70    |       |
| POLE | 16   | 17   | 18   | 19   | 20    | 21    | 22    | 23    | 24    | 25    | 26    | 27    | 28    | 29    | 30    |
| A    | 82.6 | 87.6 | 92.6 | 97.6 | 102.6 | 107.6 | 112.6 | 117.6 | 122.6 | 127.6 | 132.6 | 137.6 | 142.6 | 147.6 | 152.6 |
| B    | 75   | 80   | 85   | 90   | 95    | 100   | 105   | 110   | 115   | 120   | 125   | 130   | 135   | 140   | 145   |

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
X, ±  
.XX ±  
.XXX ±  
ANG ±

照片框

**ORDER INFORMATION**

TBX050-R10-xx-LF

SERIES

LEADFREE

02~30WAY

HIGH 10.3mm

DIP 90°

DESCRIPTION: