




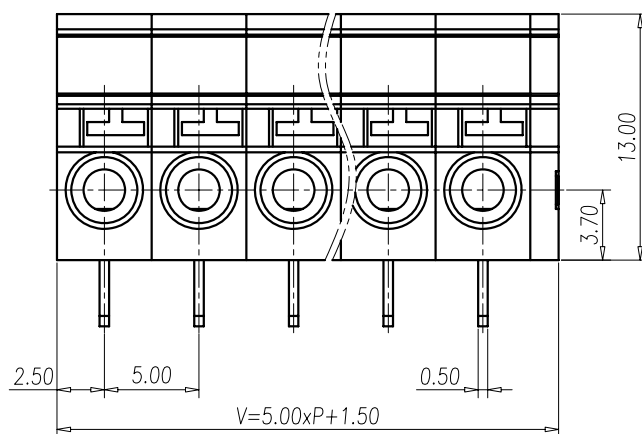

PCB LAYOUT

NOTES:

1. Rating: 300V 10 A
PITCH: 5.00 mm
2. Insulation Withstands Voltage:
AC 2000V at 1 minute
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire: AWG 26~14
6. RoHS Compliance

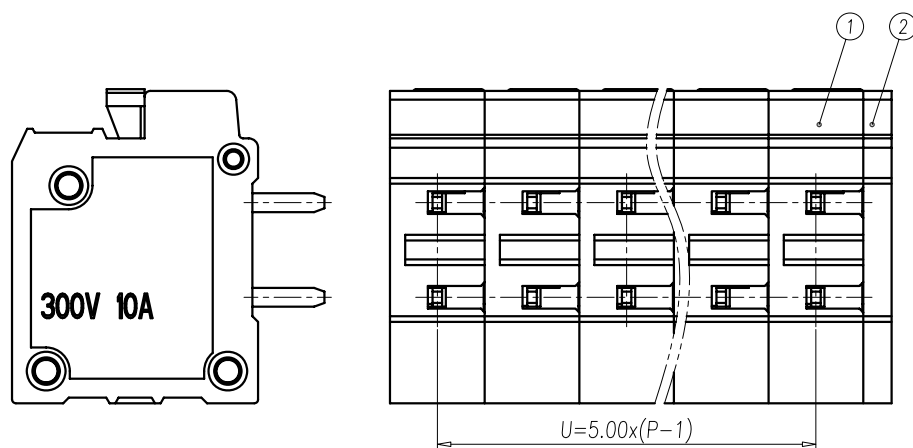

5	LEVER	PA66	UL94-V0 GREY
4	CLAMP	STEEL	
3	SOLDER PIN	COPPER ALLOY	Tin Plated
2	COVER	PA66	UL94-V0 GREY
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBX050-R13B-xx-LF

SERIES

LEADFREE

01~24WAY

TWO LEG

HIGH 13.0mm

DIP 90°

DESCRIPTION: