

Dimension

Dim.A	Nx5.0
Dim.B	(N-1)x5.0

N=Number of poles



Poles	Tol
2p-8p	±0.20
9p-16p	±0.30
17p-24p	±0.40

Material



● Item 1	Insulating body	Thermoplastic (UL94V-0)
● Item 2	Insulating cover	Thermoplastic (UL94V-0)
● Item 3	Insulating lever	Thermoplastic (UL94V-0)
● Item 4	Contact pin	Brass, Tin plated
● Item 5	Spring clamp	Stainless steel

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 7A
- Wire range:
 - Solid wire(AWG): 18-22
 - Stranded wire(AWG):
- Wire strip length: 7-7.5mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

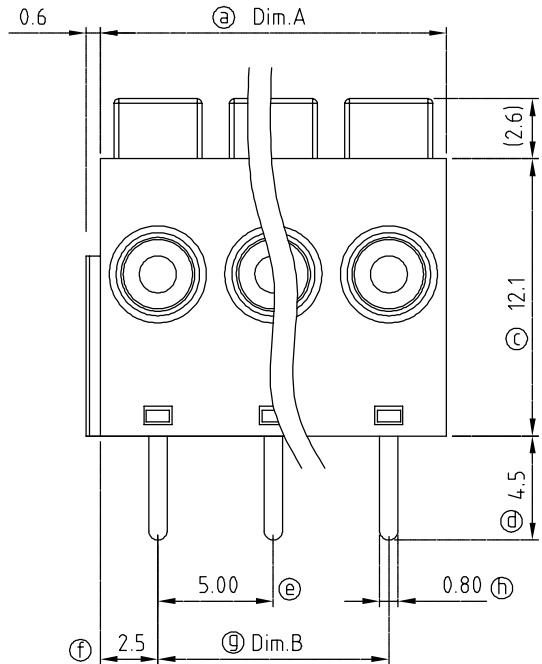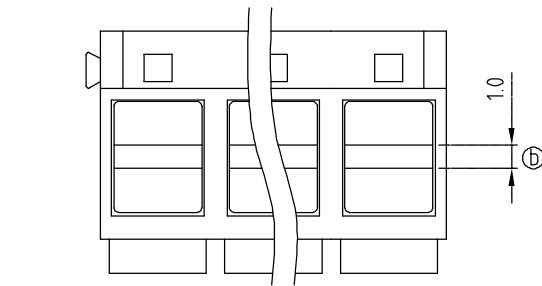

N=NUMBER OF CONTACTS

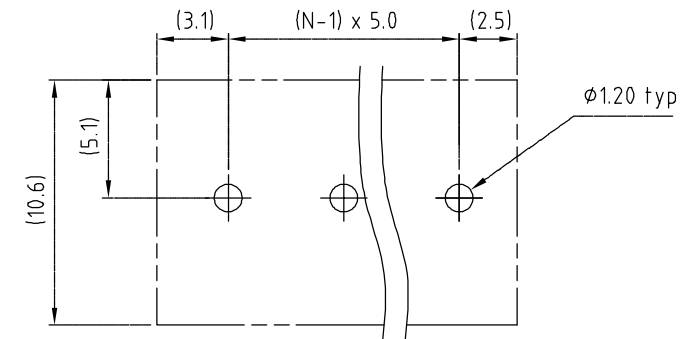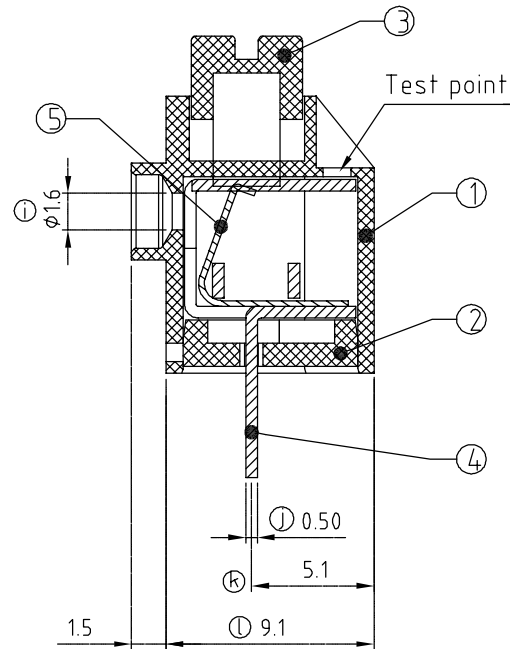

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ± 0.50
.X ± 0.30
.XX ± 0.10
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

TBX050-R14A-xx-LF

SERIES

LEADFREE

02~24WAY

A TYPE

HIGH 14.7mm

DIP 90°

DESCRIPTION: