

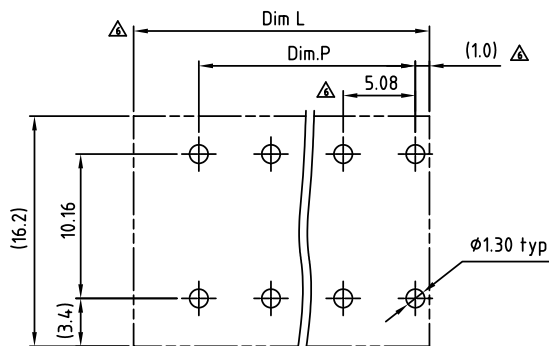


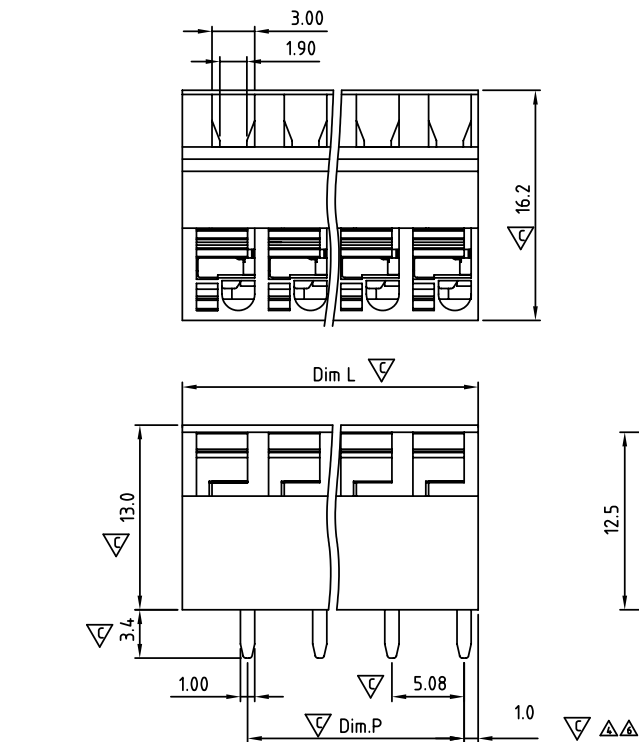

P.C.B. LAYOUT
Bottom view

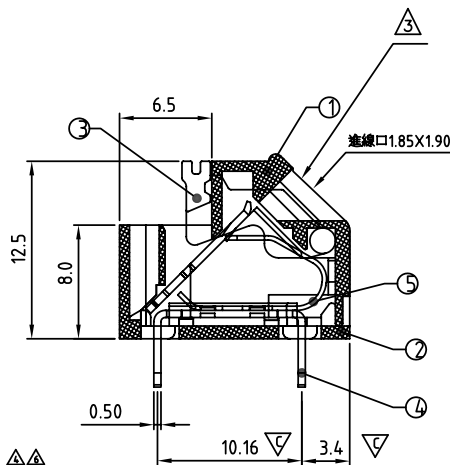

DIM	TOL			
	2P-5P	6P-12P	13P-16P	17P-24P
Dim L	N×5.08±0.5	±0.20	±0.30	±0.40
Dim P	(N-1)×5.08	±0.20	±0.30	±0.40

Material

- Item 1 Terminal body Thermoplastic (UL94V-0)
- Item 2 Terminal cover Thermoplastic (UL94V-0)
- Item 3 Terminal lever Thermoplastic (UL94V-0) Orange (RAL 2011/P)
- Item 4 Solder pin Brass, Tin plated
- Item 5 Spring clamp Stainless steel

Electrical cULus

- Voltage rating: 250VAC
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- Withstanding Voltage: 1.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension:

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION



ORDER INFORMATION

TBX051-A12-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 12.5mm

SLANT DIP

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com