

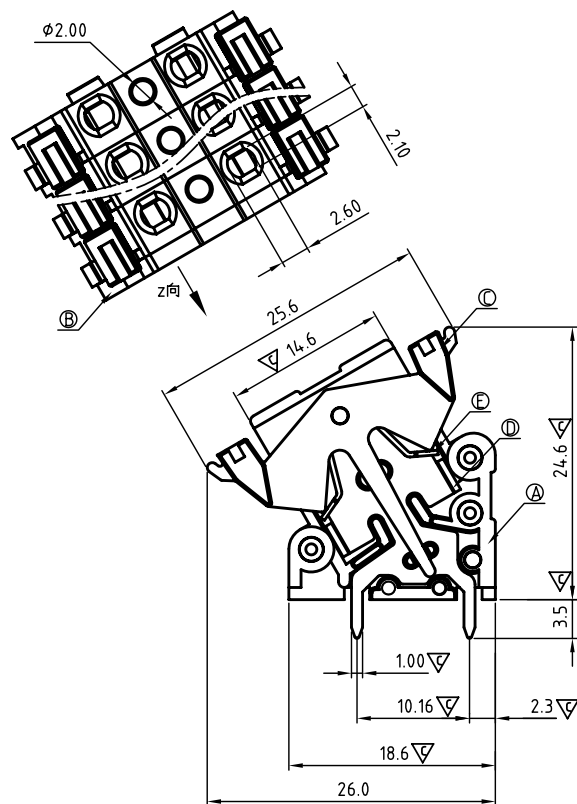


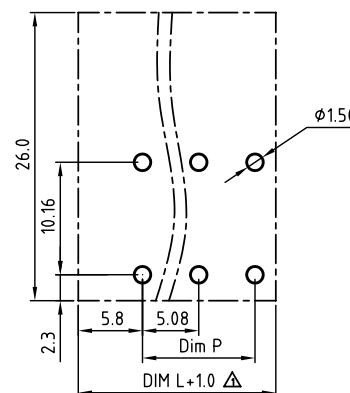

△
N=Number of Poles
Dim.P=(N-1)×5.08
Dim.L=N×5.08+1.6

Dim. \ Poles	1P-3P	4P-9P	10P-15P	16P-21P	22P-24P
Dim.L	±0.10	±0.15	±0.25	±0.35	±0.40
Dim.P	±0.10	±0.15	±0.20	±0.30	±0.35

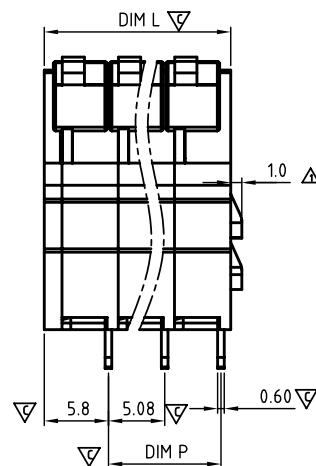

△ PCB Layout
Top view

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal cover: Thermoplastic (UL94V-0)
- △ Item ③ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
- Item ④ Contact pin : Brass. Tin Plated.
- Item ⑤ Spring clamp : Stainless steel

Electrical:

- Voltage rating: 300 V
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 14-28
- Stranded wire(AWG): 14-28
- Wire strip length: 11-12 mm
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C ±5°C/5 Sec

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBX051-A24-2Xxx-LF

SERIES

LEADFREE

2X01:02 WAY

2X24:48 WAY

HIGH 24.6mm

SLANT DIP

DESCRIPTION: