


Dimension

DIM A	N×5.08
DIM B	(N-1)×5.08

N=Number of poles

POLES	TOL
2p-6p	+0.00 -0.20
7p-12p	+0.00 -0.30
13p-16p	+0.00 -0.40
17p-24p	+0.00 -0.50





Material


- Ltem 1 Insulating body Thermoplastic (UL94V-0)
- Ltem 2 Insulating body Thermoplastic (UL94V-0)
- Ltem 3 Insulating lever Thermoplastic (UL94V-0)
- Ltem 4 Wire guard Stainless Steel
- Ltem 5 Contacts PIN PhBz (CuSn) Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Solid wire(AWG): 12-26
- Stranded wire(AWG): 12-26
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C

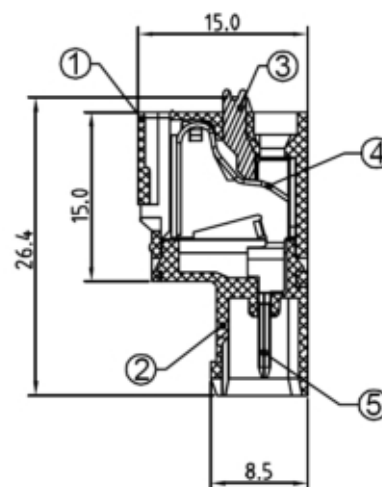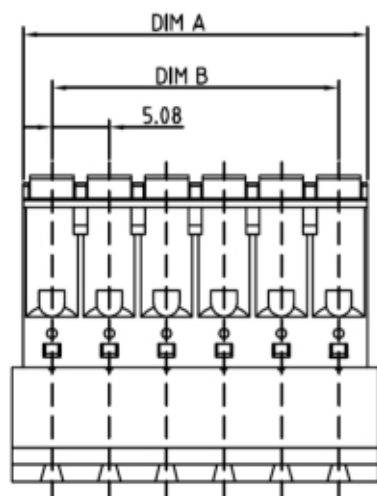

SECTION A-A

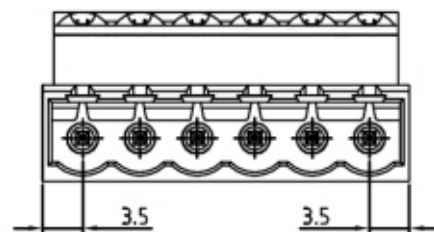

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBX051-PVB-xx-LF

SERIES

LEADFREE
02~24WAY
BOTTOM SIDE
SCREW 180°
MALE

DESCRIPTION: