

SPECIFICATIONS

BODY MATERIAL: THERMOPLASTIC (UL 94V-0), GREEN

TERMINALS: TIN PLATED BRASS

LEVER: THERMOPLASTIC (UL 94-0). ORANGE





WIRE RANGE AWG: 20 STR.

RATING: 5 AMPERES, 75 VAC

INSULATION WITHSTANDS VOLTAGE AC 1500V/MIN

INSULATION RESISTANCE 500M Ω [OR MORE AT DC 500V

MINIMUM 2 POLES WITH END WALL

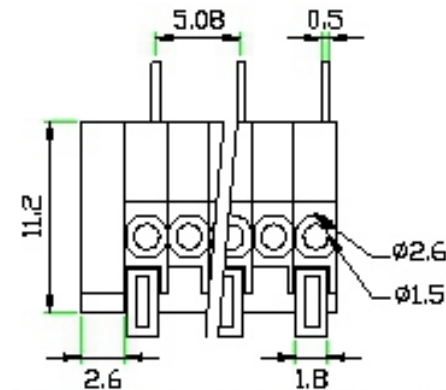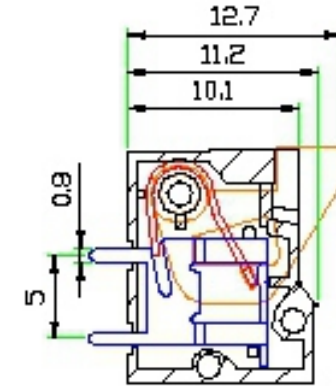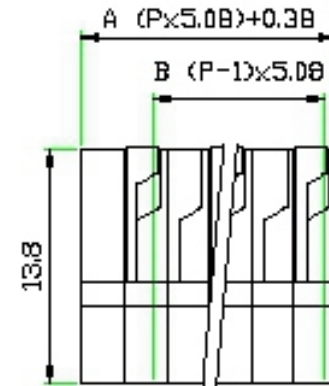

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
A	10.54	15.62	20.7	25.78	30.86	35.94	41.02	46.1	51.18	56.26	61.34	66.42	71.5	76.58	
B	5.08	10.16	15.24	20.32	25.4	30.48	35.56	40.64	45.72	50.8	55.88	60.96	66.04	71.12	
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	81.66	86.74	91.82	96.9	101.98	107.06	112.14	117.22	122.3	127.38	132.46	137.54	142.62	147.7	152.78
B	76.2	81.28	86.36	91.44	96.52	101.6	106.68	111.76	116.84	121.92	127	132.08	137.16	142.24	147.32

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TBX051-R12-xx-LF

SERIES

LEADFREE

02~30WAY

HIGH 12.7mm

DIP 90°

DESCRIPTION: