

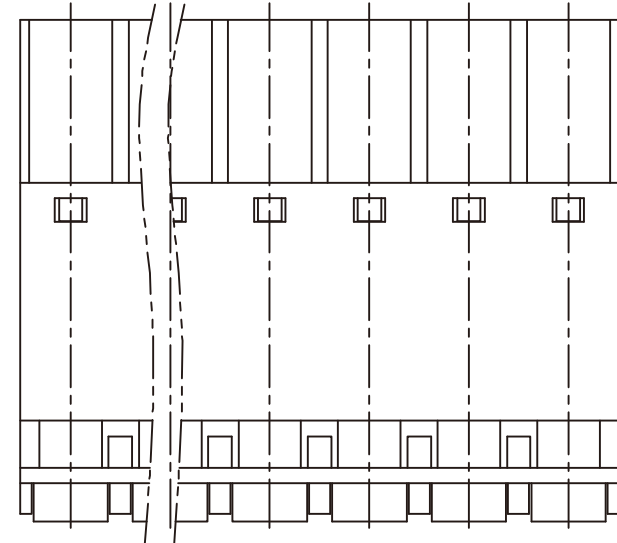
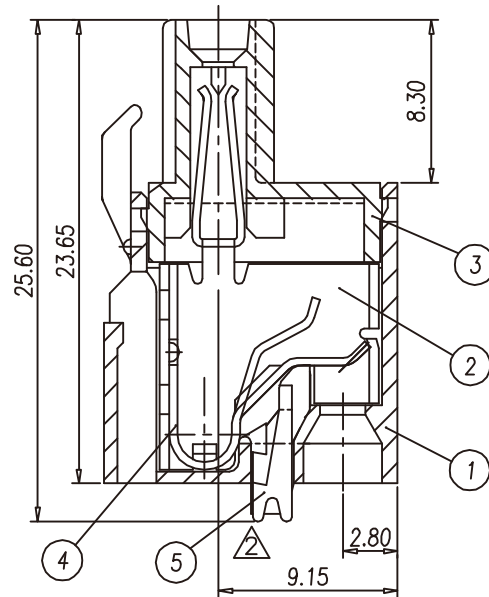


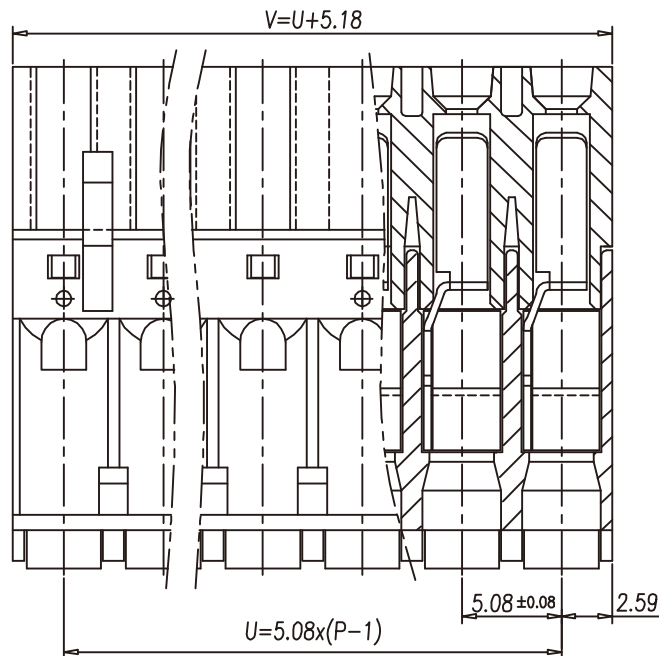

NOTES:

1. Rating: 250V 12A
PITCH: 5.08mm
2. Insulation Withstands Voltage:
AC 1500V/MIN
3. Insulation Resistance:
500M Ω or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire: AWG 24~12
6. Undimensioned Tolerances:

—	∩	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

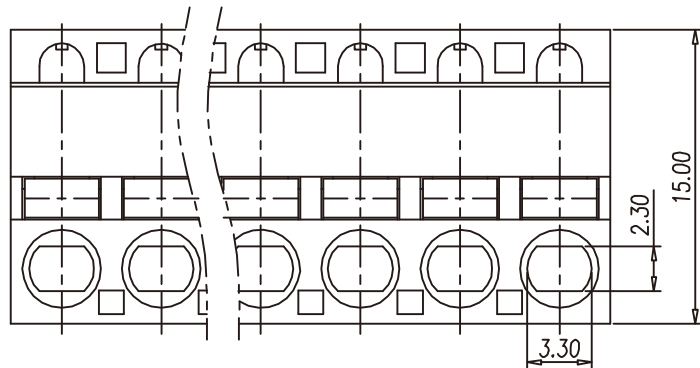

5	LEVER	P	PA66(V0)	N001
4	CLAMP2	P	STAINLESS STEEL	
3	COVER	1	PA66(V0)	G001
2	CLAMP1	P	BRONZE	Tin Plated
1	HOUSING	1	PA66(V0)	G001
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBH051-SVA-xx-LF

SERIES

LEADFREE

02~24WAY

UPPER SIDE

SCREW 180°

FEMALE

DESCRIPTION: