

Technical Data:

Material:

- Contact : Brass
- Wire guard : stainless steel
- Surface of solder tail : Tin plated
- Insulator body/housing : PBT(Glass filled)(UL94V-II)
- Insulator Level : Polyamide(Glass filled)(UL94V-II)

Electrical

- Voltage rating : 30 VAC
- Current rating : 10Amps/way max
- Contact resistance : 20mΩ|max
- Insulation resistance : 1000MΩ min.
- Wire range : 14-24AWG

Mechanical:


- Operating temperature : -55°C to +105°C
- Test temperature= 25°C 5 seconds max.

N=Number of contacts

TBX075-R13-xx-LF

LEADFREE

RoHS Compliant

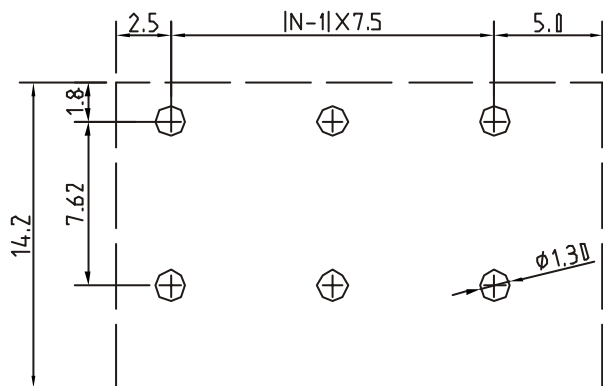

P.C.B. LAYOUT



PART NO. TBX075-R13-xx

DWG NO. TBX075-R13-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

