

## SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Lever Material: Polyamide 66(UL94V-0), Orange
- ③ Terminals: Tin Plated Brass
- ④ Contact: Stainless Strip Steel




Wire Range: 18~22 AWG

Rated: 10 Amperes.AC300V

Operation Temperature: -55°C~+115°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

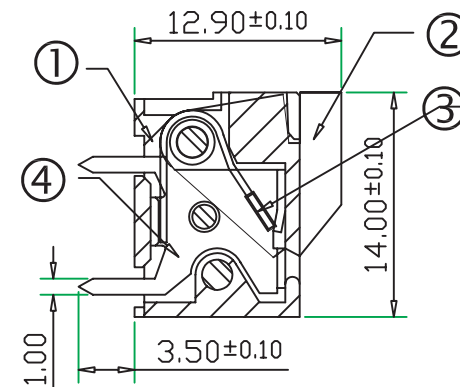

TBX076-R13-01-LF

LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. TBX076-R13-01

DWG NO. TBX076-R13-01

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

Screwless type terminal block

AREA

REVISIONS

HK

DATE

煜倫股份有限公司