
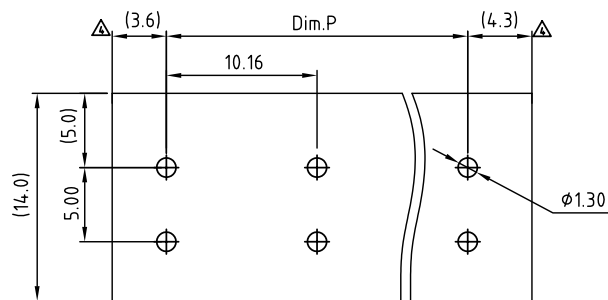
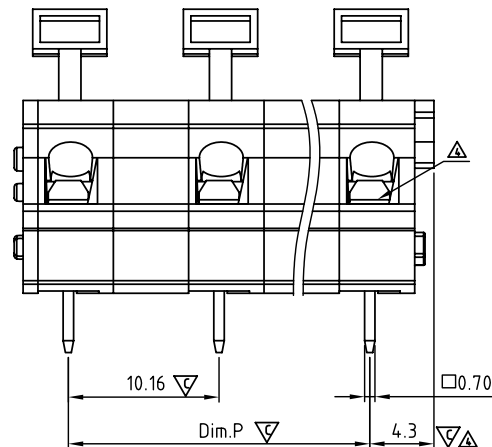
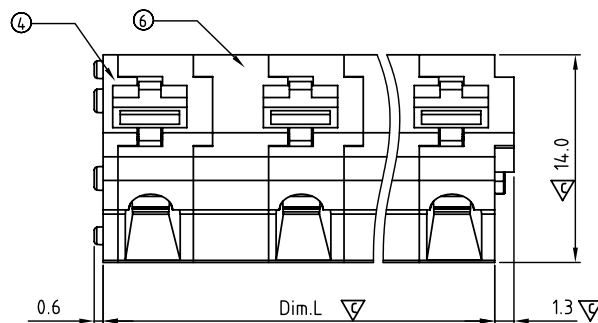


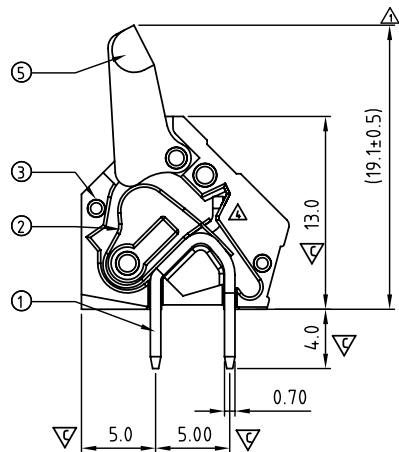

△ PCB LAYOUT
Top view

Material

- Item 1 Solder pin : Brass , Tin plated
- Item 2 Spring clamp : Stainless steel
- Item 3 Terminal housing: Thermoplastic (UL94V-0)
- Item 4 Terminal cover: Thermoplastic (UL94V-0)
- △ ● Item 5 Terminal lever: Thermoplastic (UL94V-HB)
- Item 6 Terminal pad: Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- △ ● Critical dimension: ▽

△ N=Number of Poles

$$\text{Dim.P} = (N-1) \times 10.16$$

$$\text{Dim.L} = (N-1) \times 10.16 + 6.08$$

Poles Dim.	2P-6P	7P-12P
Dim.L	±0.25	±0.40
Dim.P	±0.25	±0.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBX101-A19-xx-LF

SERIES

LEADFREE

02~24WAY

HIGH 19.1mm

SLANT DIP

DESCRIPTION: