

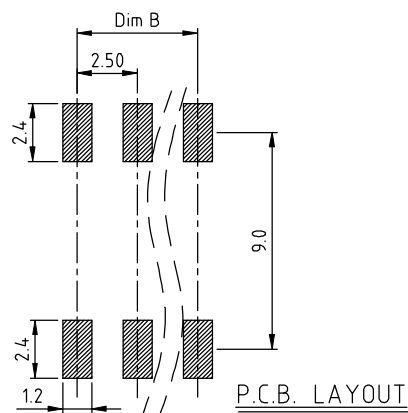
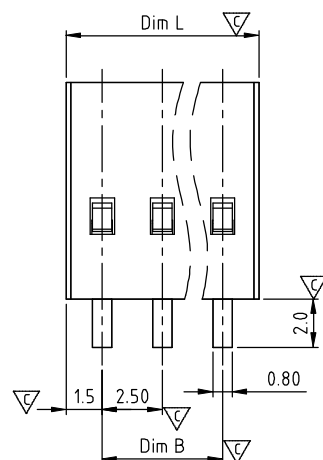




N=Number of poles

Dim.L	$(N-1) \times 2.5+3.0$
Dim.B	$(N-1) \times 2.5$

POLES	TOLERANCE
2P ~ 3P	-0.15/+0.15

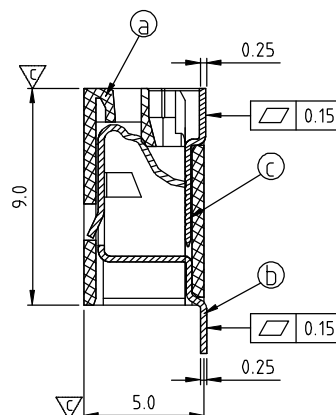

Material:

- Item a Terminal housing:LCP (UL94V-0)
- Item b Long solder pin: Copper alloy, Bright Tin plated over Nickel plated.
- Item c Short solder pin: Brass, Bright Tin plated over Nickel plated.

Electrical UL /cULus (UL1977Standard)

- Voltage rating: 300VAC 300VAC
- Current rating: 6A 3A
- Wire range:
- Solid wire(AWG): 20~26
- Tin Dipped Stranded wire(AWG): 20~26
- Wire strip length: 6~7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec Max.
- Safety Approval: us
- Critical dimension:

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.10

.XXX, ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TBY025-W05-xx-LF

SERIES

LEADFREE

02.03 WAY

HIGH 5.0mm

90°SMT

DESCRIPTION: