
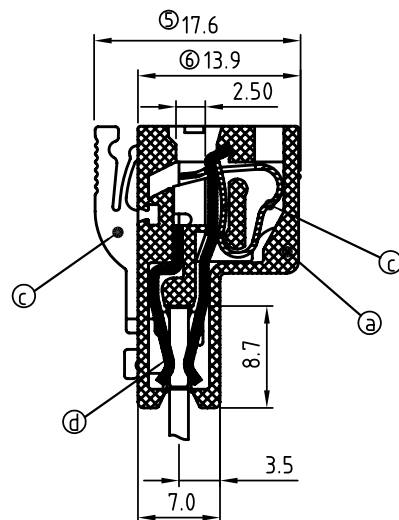
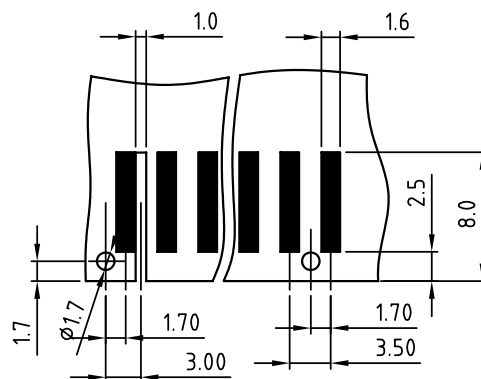




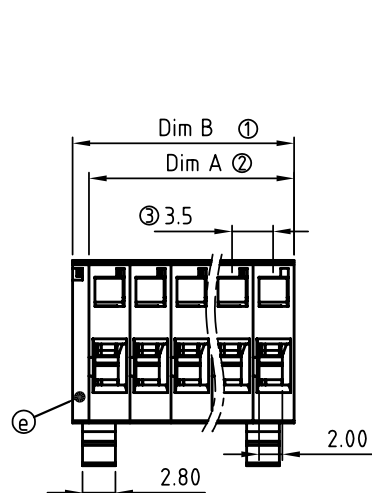

Material

- Item ③ Insulator (Body): Thermoplastic (UL94V-0)
- Item ④ Insulator (Lever): Thermoplastic (UL94V-0)
- Item ⑤ Spring clamp : Stainless Steel
- Item ⑥ Female Contact : PhBz(CuSn), Tin plated
- Item ⑦ Insulator (Cover): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 8A
- Solid wire(AWG): 16~26
- Stranded wire(AWG): 16~26
- Wire strip length: 7~8mm
- Withstanding Voltage: 1.6KV
- Size of the PCB: 1.6±0.2mm
- Operating temperature: -40°C to +115°C

Poles	2	3	4	5	6	7	8	9	10	11	12	13
Dim A	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.5	45.5
Dim B	8.4	11.9	15.4	18.9	22.4	25.9	29.4	32.9	36.4	39.9	43.4	46.9
TOL	±0.15						±0.20					
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	80.5	84.0	
Dim B	50.4	53.9	57.4	60.9	64.4	67.9	71.4	74.9	78.4	81.9	85.4	
TOL	±0.30						0.35					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TBY035-EW-xx-LF

SERIES T LEADFREE
02~24WAY
WIRE
EAR

DESCRIPTION: