
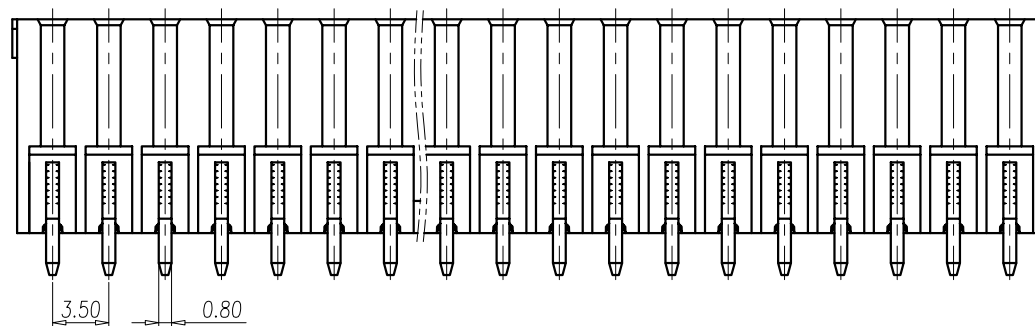
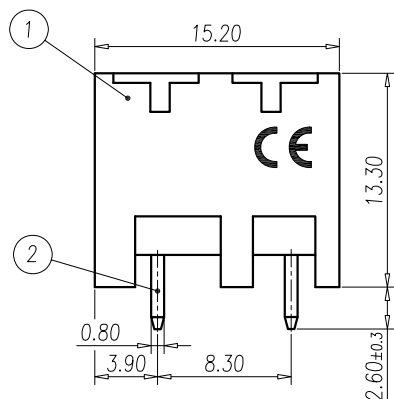
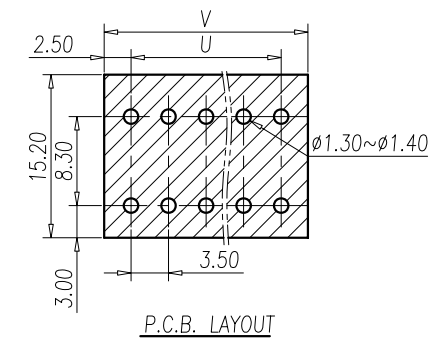


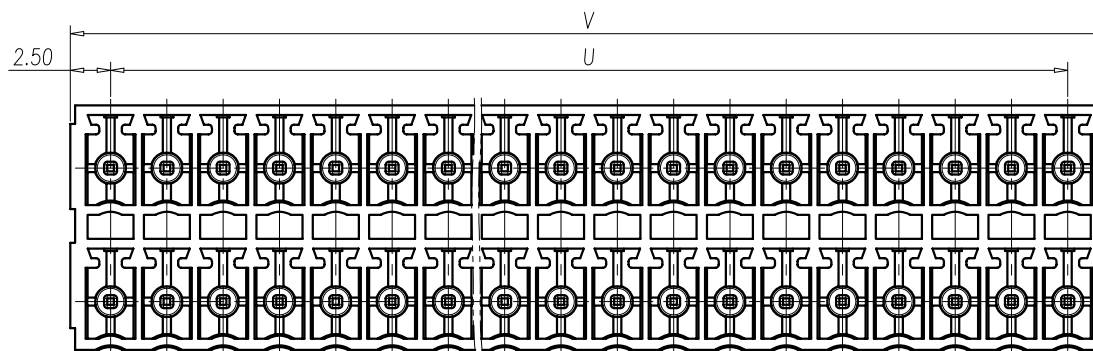

P	4	6	8	10	12	14	16	18	20	22	24	
U	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	
V	8.50	12.00	15.50	19.00	22.50	26.00	29.50	33.00	36.50	40.00	43.50	
P	26	28	30	32	34	36	38	40	42	44	46	48
U	42.00	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50
V	47.00	50.50	54.00	57.50	61.00	64.50	68.00	71.50	75.00	78.50	82.00	85.50

2	SOLDER PIN	COPPER ALLOY	Tin Plated
1	HOUSING	PA46	UL94-V0 BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

NOTES:

- Rating: 300V 8A
PITCH: 3.50mm
- Insulation Withstands Voltage:
AC 1600V/MIN, 2500V/MIN(MAX)
- Insulation Resistance:
PA46=1000MΩ or more at DC500V
- Using Temperature Range:
PA46=-40°C~+260°C
- RoHS compliance

Normal Geometric Tolerancing				
— //		≡	⊥	
0 to 100	0.2	0.3	0 to 10	0.2
over 100 to 150	0.3		over 10	0.3
over 150	0.5			
Total Pitch Tolerances		Normal dimension Tolerances		
0<U≤30	±0.20	0~30	±0.25	
30<U≤53	±0.25	over 30~53	±0.30	
53<U≤70	±0.30	over 53~70	±0.35	
70<U≤90	±0.35	over 70~90	±0.44	
90<U≤115	±0.44	over 90~115	±0.55	
115<U≤150	±0.55	over 115~150	±0.70	
150<U≤200	±0.70	over 150~200	±0.85	
200<U≤250	±0.85	over 200~250	±1.00	
250<U≤320	±1.00	over 250~320	±1.20	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBY035-PD13-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X24:48WAY

HIGH 13.3mm

DIP 180°

MALE

DESCRIPTION: