
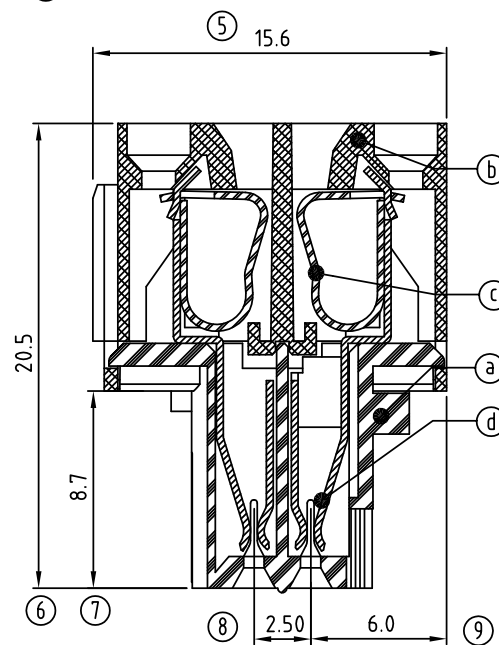


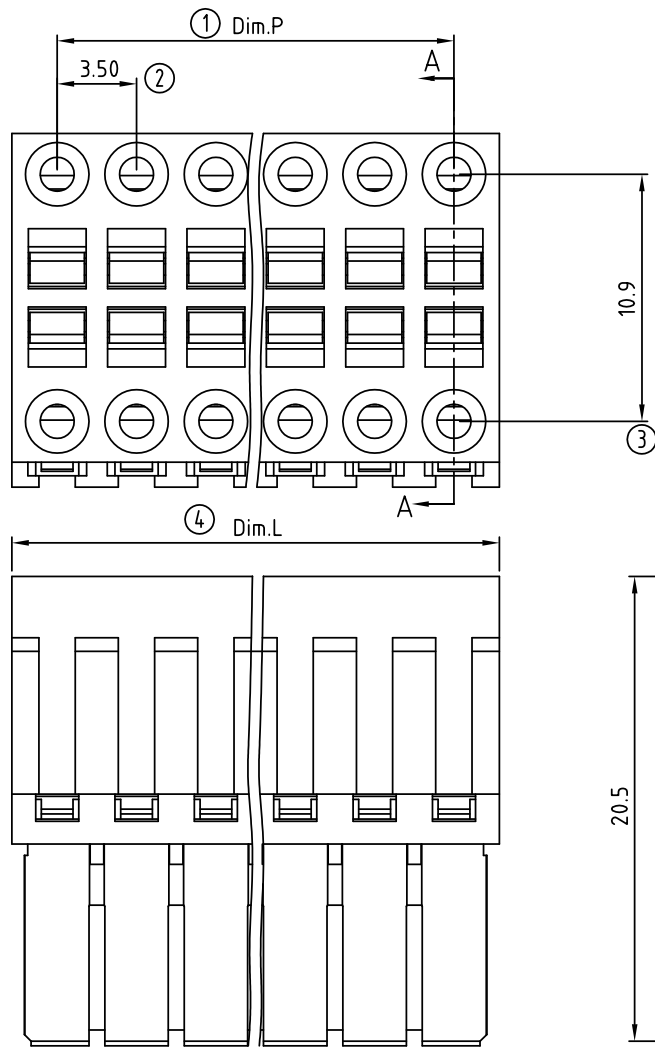

SECTION A-A

## Material

- Item ① Terminal up housing Thermoplastic (UL94V-0)
- Item ② Terminal down housing Thermoplastic (UL94V-0)
- Item ③ Spring clamp Stainless steel
- Item ④ Female contact PhBz , Tin plated

## Electrical

- Voltage rating: 150V
- Current rating: 7A
- Solid wire(AWG): 18-28
- Stranded wire(AWG): 18-28
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

N=Number of poles

$$\text{DimL} = (N/2 - 1) \times 3.5 + 4.0$$

$$\text{DimP} = (N/2 - 1) \times 3.5$$

| POLES       | Dim. Tol | Dim.L | Dim.P |
|-------------|----------|-------|-------|
| 2x2p-2x6p   |          | ±0.15 | ±0.10 |
| 2x7p-2x12p  |          | ±0.25 | ±0.20 |
| 2x13p-2x18p |          | ±0.30 | ±0.25 |
| 2x19p-2x24p |          | ±0.40 | ±0.35 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBY035-SV2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X24:48WAY

SCREW 180°  
FEMALE

DESCRIPTION: