



N=Number of contacts

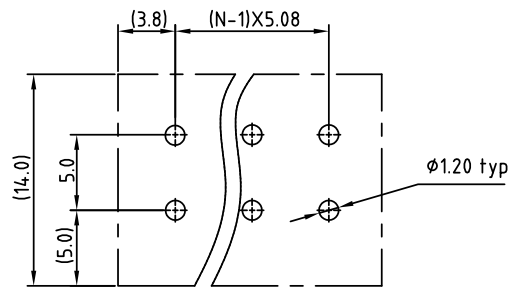

P.C.B. LAYOUT

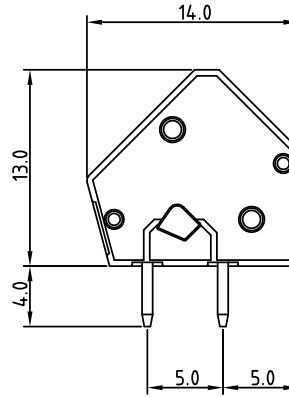

Material

Terminal body(Contact pin): Brass  
 Surface of solder tail: Tin plated  
 Wire guard: Stainless steel  
 Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- ▲ Soldering temperature: 250°C±10°C/5 Sec

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

TBY051-A13-xx-LF

SERIES | LEADFREE  
 02~24WAY  
 HIGH 13.0mm  
 SLANT DIP

DESCRIPTION: