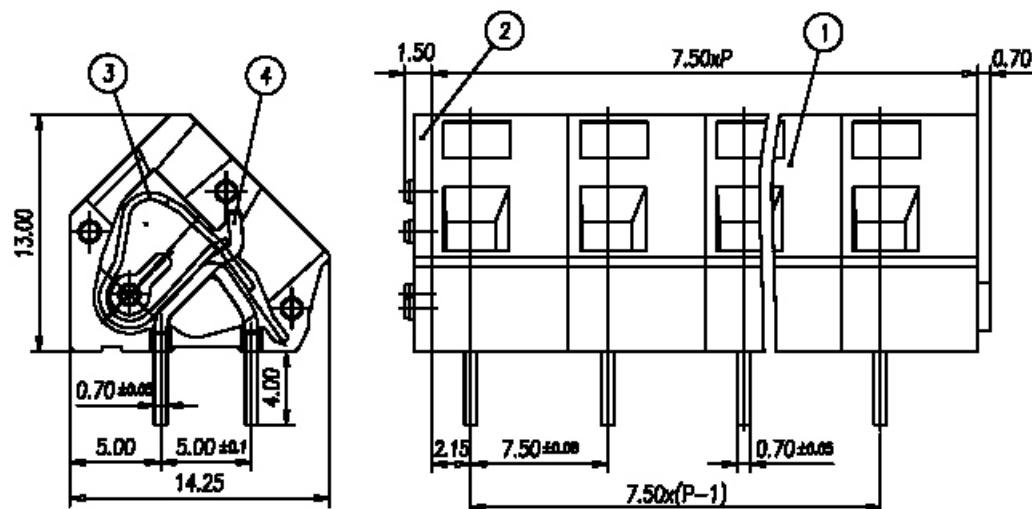
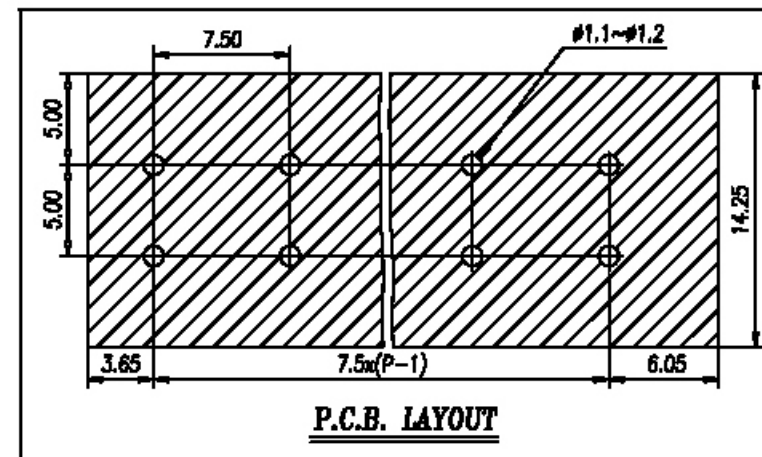
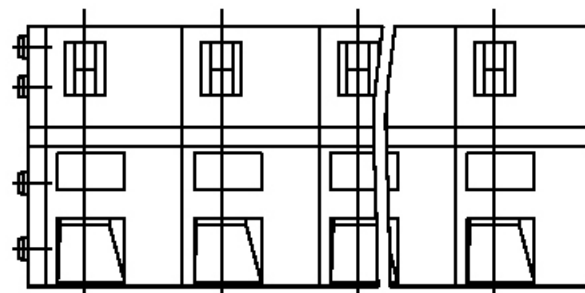


NOTES:

1. Rating: 300V 15A (IEC 450V)
PITCH: 7.50mm
2. Insulation Withstands Voltage:
AC 2500V/MIN
3. Insulation Resistance:
1000MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire:
AWG 28~12 (IEC 0.5~2.5mm²)
6. Undimensioned Tolerances:

—	∠	∇	0.05/10
⊥	∥	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			

4	SOLDER PIN	Q119B00100	P	COPPER	Tin Plated
3	CLAMP	X000003100	P	Stainless Steel	
2	END COVER	Q119L2XX00	1	PA66(V0)	MO01 -0000
1	HOUSING	Q119A9XX00	P	PA66(V0)	MO01 -0000
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TBY075-A13-xx-LF

SERIES

LEADFREE
02~24WAY
HIGH 13.0mm
SLANT DIP

DESCRIPTION: