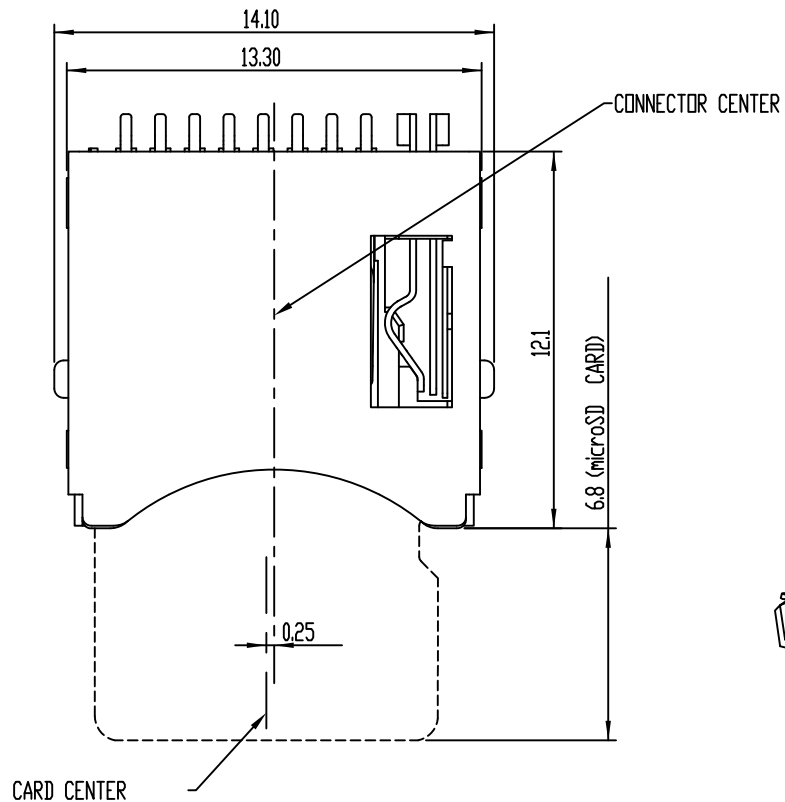


MATERIAL:
INSULATOR: HIGH TEMPRATURE THERMOPLASTIC,
UL94V-0,BLACK
CONTACT: PHOSPHOR BRONZE

PLATING:
CONTACT AREA PLATING: Gold 10u" OVER Ni
SOLDER AREA : Tin Plated OVER 50u" Ni

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

TFC-WPBP10-08-LF
SERIES POST 10.0mm
LEADFREE 08WAY
BOTTOM CONTACT
PUSH PUSH
90°SMT

DESCRIPTION: Micro SD Socket Push-Push Type

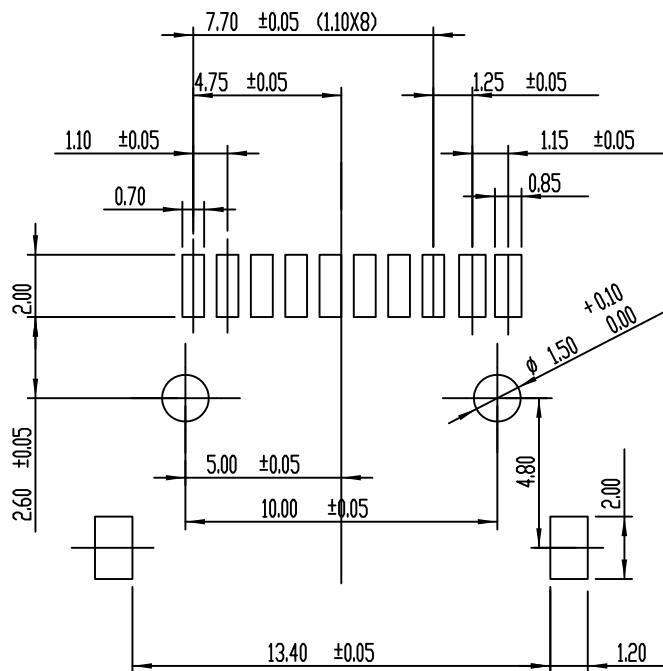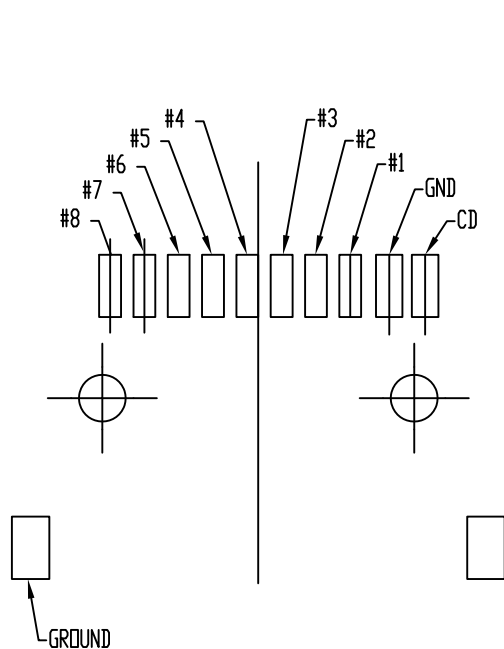

PCB LAYOUT FOR Modile Phone

MP3
Camera
Single Slot Card Reader

CIRCUIT:

WITHOUT CARD	CARD INSERTED
CD ○ ○ GROUND	CD ○ — ○ GROUND

Pin Assignment:

#1	DTA2
#2	CD/DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

TFC-WPBP10-08-LF
SERIES POST 10.0mm
LEADFREE
08WAY
BOTTOM CONTACT
PUSH PUSH
90°SMT

DESCRIPTION: Micro SD Socket Push-Push Type

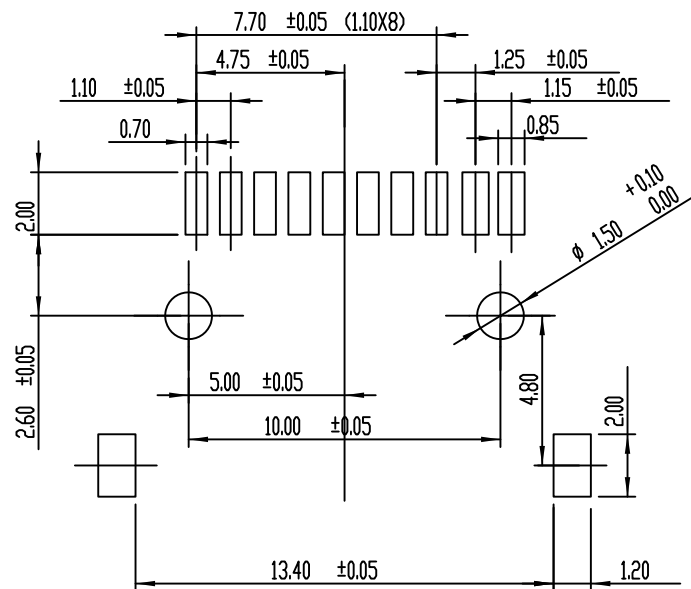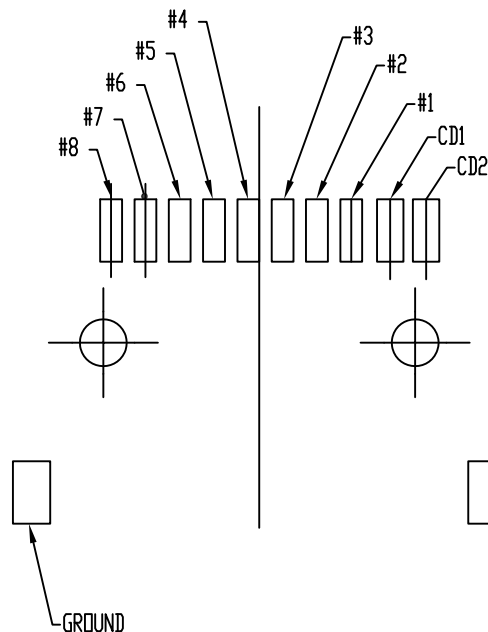


Pin Assignment:

#1	DTA2
#2	CD/DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1

PCB LAYOUT FOR Multi Slot Card Reader

CIRCUIT:

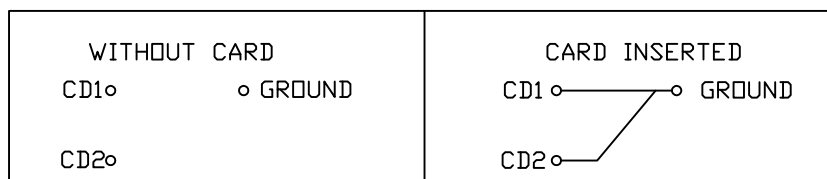

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TFC-WBP10-08-LF
SERIES
LEADFREE
08WAY
POST 10.0mm
BOTTOM CONTACT
PUSH PUSH
90°SMT

DESCRIPTION: Micro SD Socket Push-Push Type