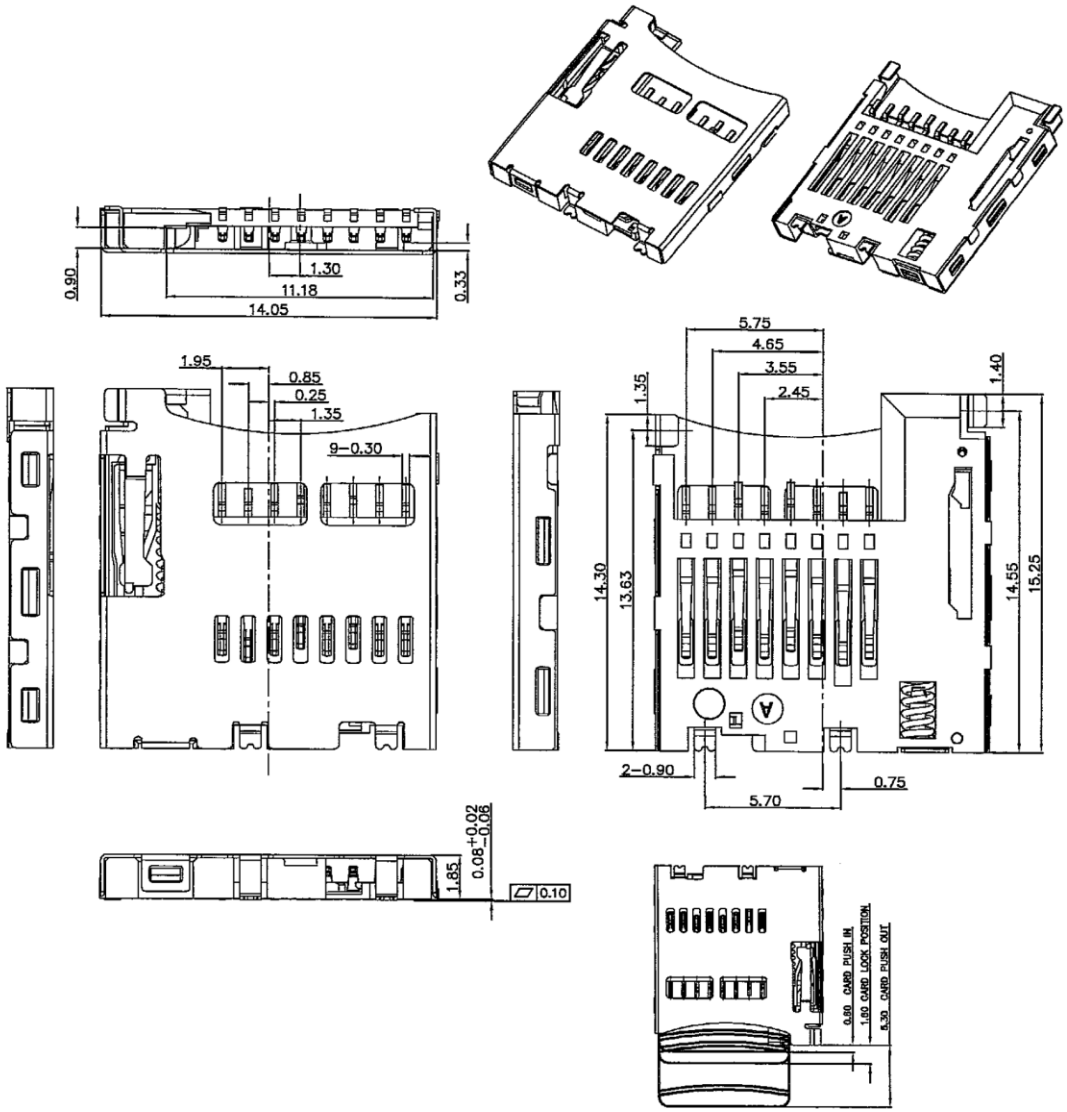

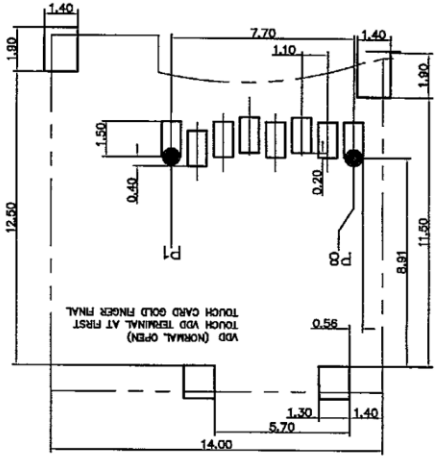

RECOMMEND PCB LAYOUT
GENERAL TOLERANCE ±0.05

NOTES :

1. MATERIAL :
   - 1.1 HOUSING:LCP UL94 V-0, BLACK COLOR.
   - 1.2 SHELL: STAINLESS STEEL
   - 1.3 CONTACT: COPPER ALLOY
2. FINISH :
   - 2.1 CONTACT: GOLD PLATING ON CONTACT AREA, MATTE TIN 100u"MIN ON SOLDERTAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
   - 2.2 SHELL: 30u" MIN NICKEL PLATING OVERALL. Au 1u"MIN ON SOLDERTAIL AREA.
3. EIECTRICAL CHARACTERISTICS:
   - 3.1 OPERATING VOLTAGE : 100V AC(rms)/DC.
   - 3.2 CURRENT RATING : 0.5 A.
   - 3.3 OPERATING TEMPERATURE: -25°C~+85°C.
   - 3.4 CONTACT RESISTANCE: 100 m OHMS MAX.
   - 3.5 INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
   - 3.6 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC/1MINUTE.

Pin No.		MICRO SD
PIN1	DAT2	1P
PIN2	CD/DAT3	2P
PIN3	CMD	3P
PIN4	VDD	4P
PIN5	CLK	5P
PIN6	VSS	6P
PIN7	DAT0	7P
PIN8	DAT1	8P

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.25
		.XX ± 0.15
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

TFC-WPCE12-08-LF

- SERIES
- 90°SMT
- PUSH PUSH
- C/LAYOHT
- EAR 12.5mm
- 08WAY
- LEADFREE

DESCRIPTION: