
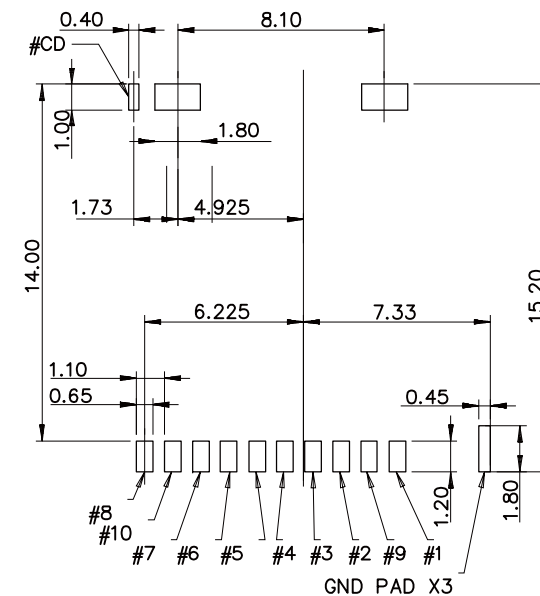

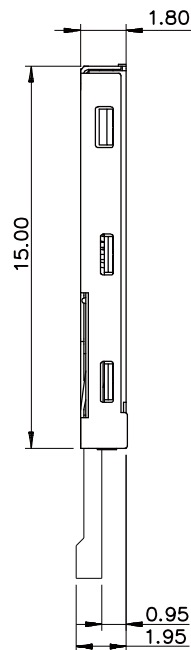
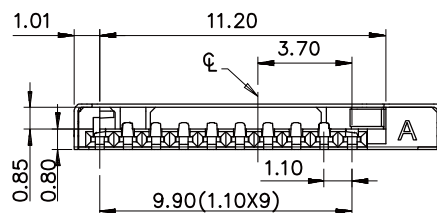


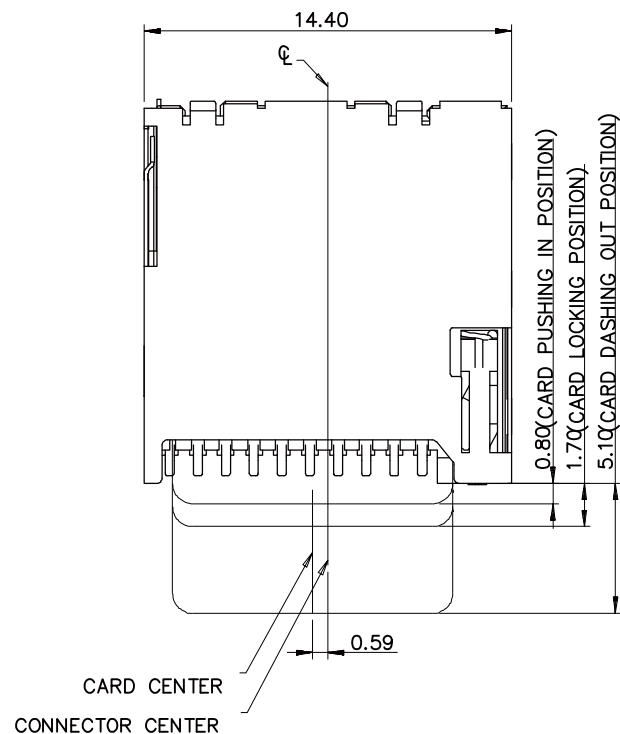

PCB LAYOUT

Pin Assignment:	
#1	DTA2
#2	DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1*
#9	RFIO4
#10	RFIO4
#CD	CD

CIRCUIT:	
WITHOUT CARD	CARD INSERTED
CD GROUND	CD GROUND

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT
 AREA TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -20°C~+60°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

TFC-WPCE15B-08-LF
 SERIES LEADFREE
 90°SMT 08WAY
 PUSH PUSH SWITCH OPEN
 EAR 15.2mm
 C/LAYOHT

DESCRIPTION: microSD A&B Type & T-Flash
 Push-Push Connector