



P.C.B Layout (Top View)

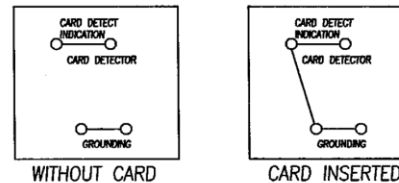

NOTES:

- General Characteristics
Mounting System:SMT
- Material and Finish:
Insulation material:High Temperature Plastic (UL94V-0)
Contact material:Copper Alloy
Contact Finish:See Order Information Selectivity.
- Electrical Characteristics
Contact resistance: Contact: Initial value : 100 mΩ Max.
Insulation resistance:>1000 mega ohms /500V DC
Withstanding Voltage: 500V AC (rms) for 1minute
Operation:Normally open.
- Environmental Characteristics
Operating temperature:-25°C~+85°C



T-FLASH	
PIN	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

.XXX ± 0.10

DATE

ANG ±

SIZE A4

PROJECTION



照片框

ORDER INFORMATION

TFC-WPCP10B-08-LF
SERIES | | | | LEADFREE
| | | | 08WAY
| | | | SWITCH OPEN
90°SMT | | | | POST 10.38mm
| | | | C LAYOUT
| | | | PUSH PUSH

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com