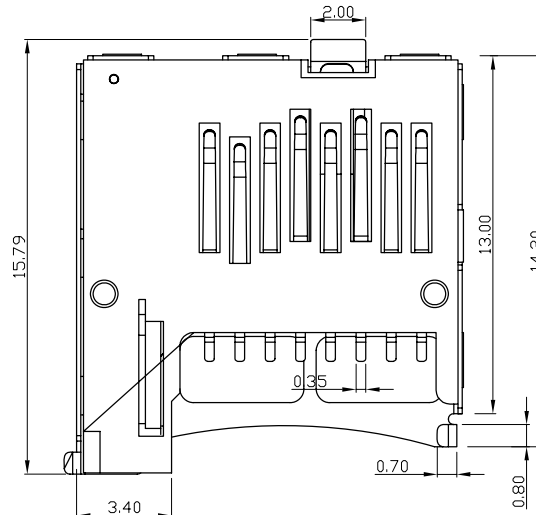
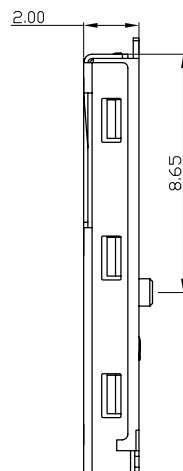
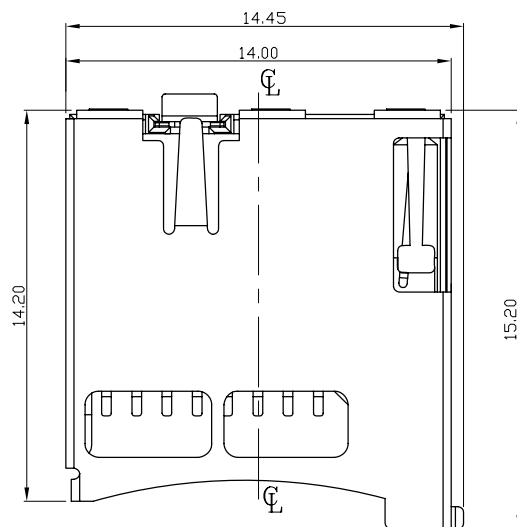


Usable Memory Card
Micro SD Card
Dimension:(Unit:mm)

Specification

Material:

Housing: LCP
Contacts: PHosphor Bronze C5210-EH.
Shell: SUS304-3/4H

Plating:

Contacts: 50"U Nickel Overall
10"U Gold Selective Contact Area
100"U Sn OVER NICKEL
Shell: 50"U Nickel Overall
1"U Gold Selective Contact Area

Electrical:

Current Rating :0.5mA max.
Contact Resistance:100m Ω max
Insulation Resistance:1000M Ω min./500VDC
Dielectric Withstanding Voltage:500VAC/minute
Operating Temperature:-25°C to+85°C
Mating Cycles:7,000 Insertions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION


TFC-WPCP12AR-08-LF
SERIES | 08WAY | LEADFREE
90°SMT | REEL | SWITCH CLOSE
PUSH PUSH | POST 12.0mm
C LAYOUT

DESCRIPTION: Micro SD PUSH-PUSH

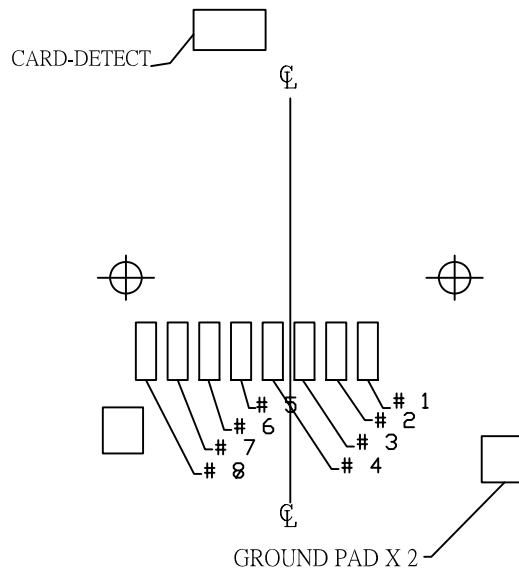

Notices:

WITHOUT CARD	CARD INSERTED
CD GROUND	CD GROUND

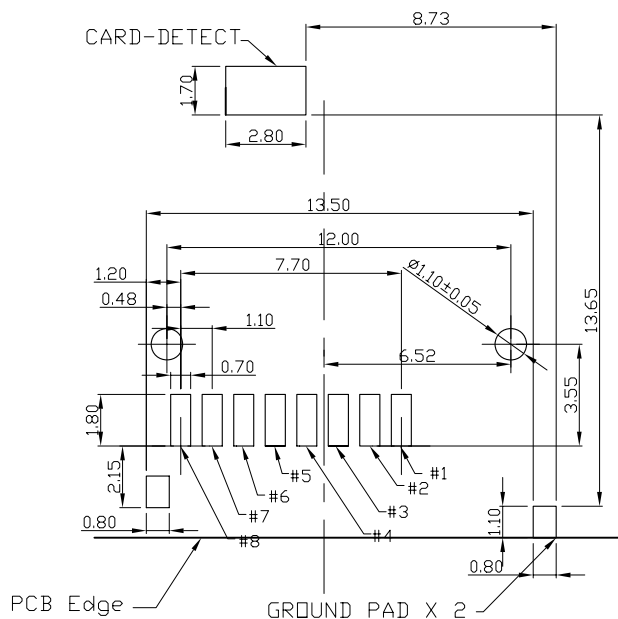

RECOMMEND PCB LAYOUT

Pin Assignment:	
#1	DTA2
#2	CD/DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1 ²

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION


TFC-WPCP12AR-08-LF
SERIES REEL 08WAY LEADFREE
90°SMT SWITCH CLOSE
PUSH PUSH POST 12.0mm
C LAYOUT

DESCRIPTION: Micro SD PUSH-PUSH


Micro SD Push-push Socket Or Micro SD Card Insert Drawing :(Unit:mm)




Release Position

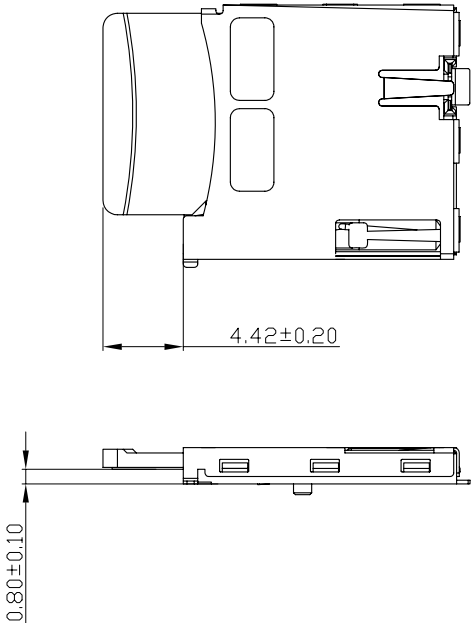

Overstock Position

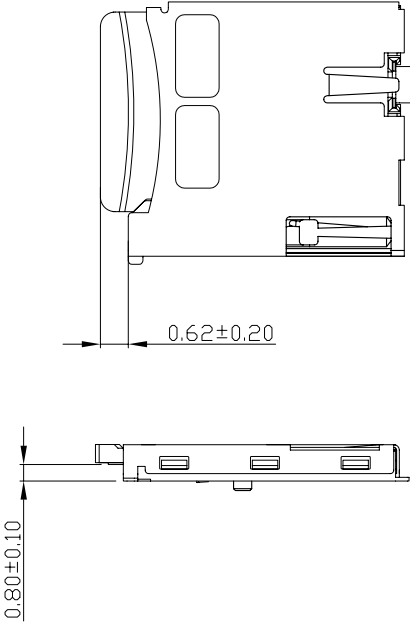

Function

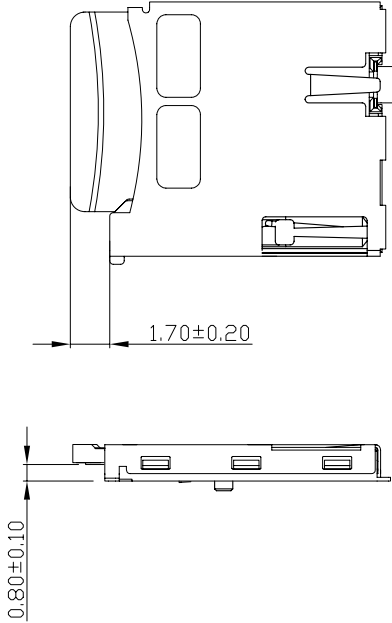

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TFC-WPCP12AR-08-LF

SERIES

90°SMT

PUSH PUSH

C LAYOUT

REEL

SWITCH CLOSE

POST 12.0mm

08WAY

LEADFREE

DESCRIPTION: Micro SD PUSH-PUSH

Packing Standard

Date :2007.11.12


Rev. :B

Name Document	Standard	Title	Micro SD Push-push	N0		Page	1/1
---------------	----------	-------	--------------------	----	--	------	-----


Description :

PART NO.	TAPE&REEL		CARTON		Weight (KG)	
	Dimension (mm)	Q'TY (PCS)	Dimension (mm)	Q'TY (PCS)	N.W	G.W
	ø330×44(H)	1000	350(L)×350(W) × 300(H)	1000× 10(TAPE&REEL)= 10000	5.1	7.24


a.



b.



c.



RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

TFC-WPCP12AR-08-LF
 SERIES REEL 08WAY LEADFREE
 90°SMT SWITCH CLOSE
 PUSH PUSH POST 12.0mm
 C LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±

SIZE A4

PPOJECTION

DESCRIPTION: Micro SD PUSH-PUSH