


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: STAINLESS STEEL
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 80m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+85°C

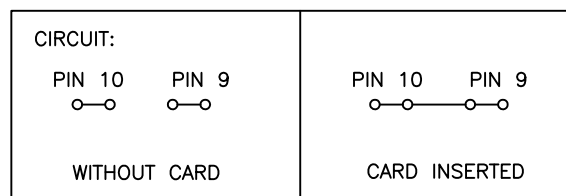

Pin	No.	NAME
1	DAT 2	
2	CD/DAT 3	
3	CMD	
4	VDD	
5	CLK	
6	VSS	
7	DAT0	
8	DAT1	
9	CARD DETECT	
10		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TFC-WXBE10H2xB-08-LF

SERIES | 90°SMT | NON PUSH | BOTTOM CONTACT | EAR 1.0mm | 08 WAY | LEADFREE | SWITCH OPEN | H22:HIGH 2.20mm | H23:HIGH 2.35mm | H25:HIGH 2.50mm | H26:HIGH 2.65mm

DESCRIPTION: MICRO SD (T-FLASH), PCB MOUNT, SMT, METAL SHIELD, FEMALE