

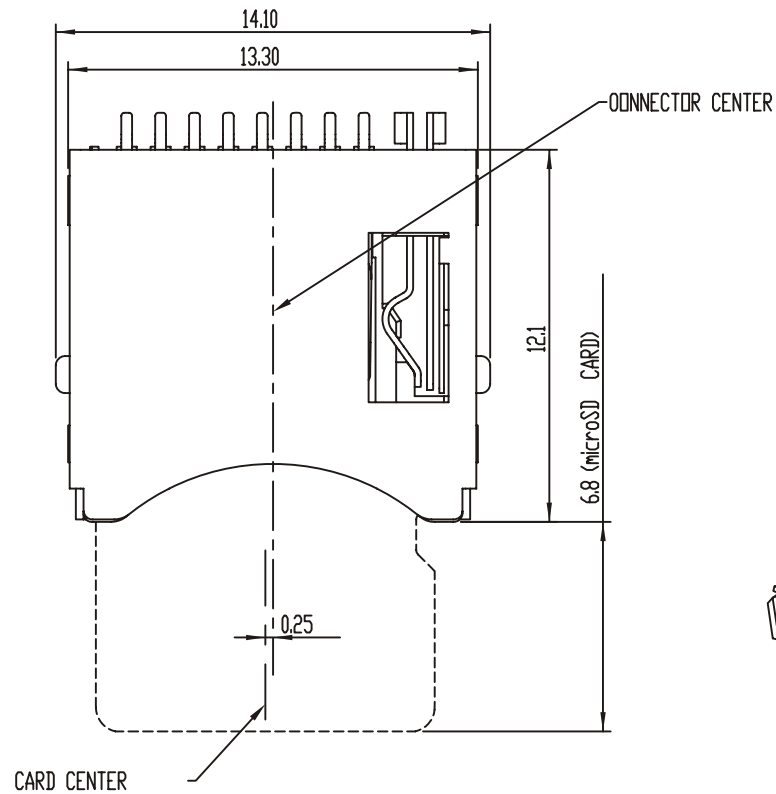
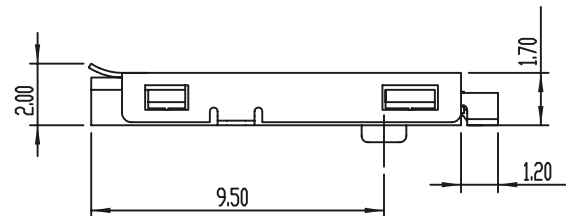


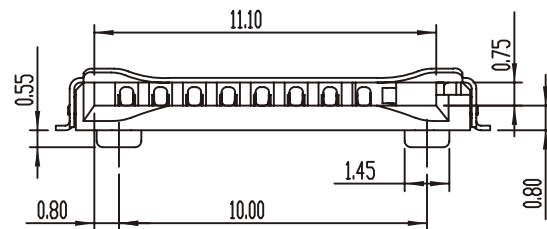

MATERIAL:
INSULATOR: HIGH TEMPRATURE THERMOPLASTIC,
UL 94V-0, BLACK
CONTACT: PHOSPHOR BRONZE

PLATING:
CONTACT AREA PLATING: Gold 10u" OVER Ni
SOLDER AREA : Tin Plated OVER 50u" Ni

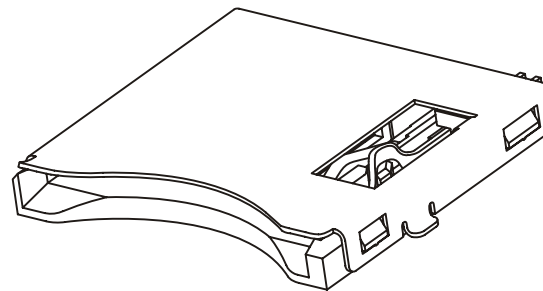

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION


照片框

ORDER INFORMATION

TFC-WXBP10-08-LF

SERIES
LEADFREE
08 WAY
POST 10mm
BOTTOM CONTACT
NON PUSH
90°SMT

DESCRIPTION: Micro SD Socket Push-Pull Type

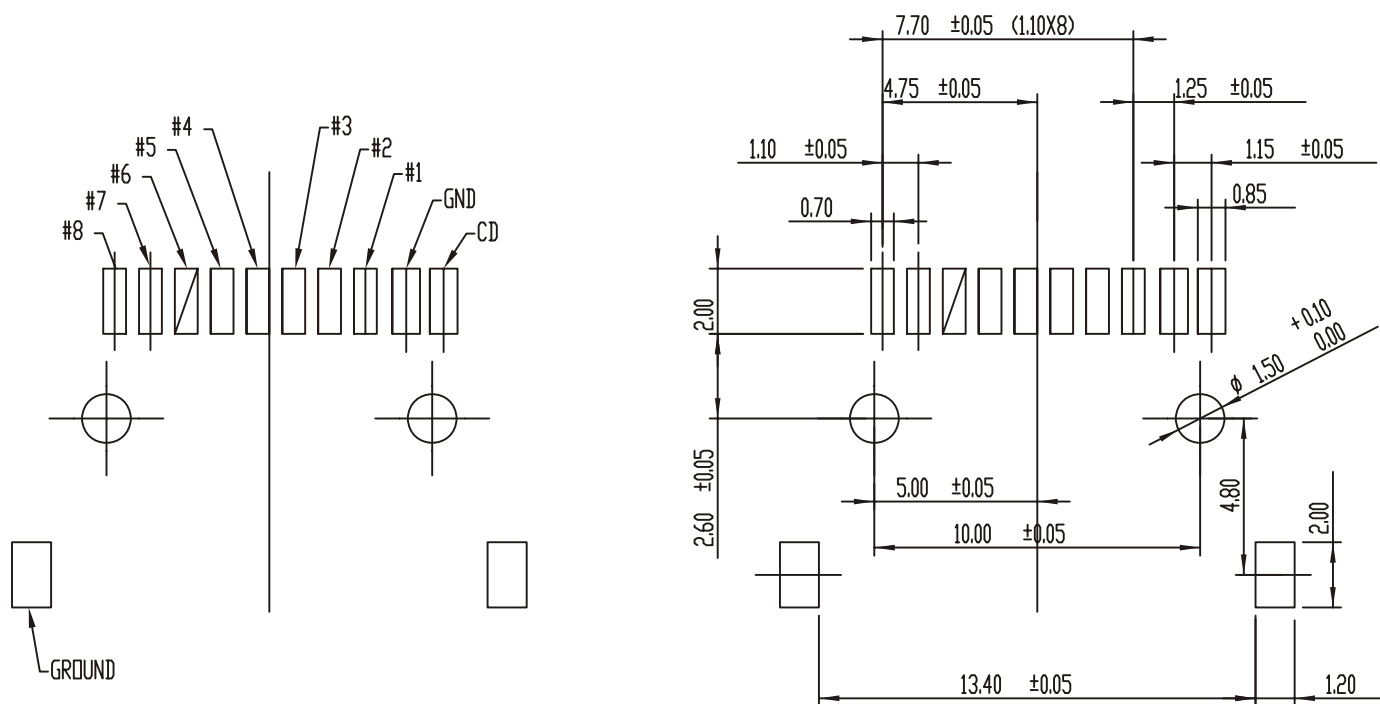

Pin Assignment:

#1	DTA2
#2	CD/DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1

PCB LAYOUT FOR Modile Phone

MP3
Camera
Single Slot Card Reader

CIRCUIT:

WITHOUT CARD	CARD INSERTED
CD ○ ○ GROUND	CD ○ ——— ○ GROUND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

TFC-WXBP10-08-LF
SERIES POST 08 WAY LEADFREE
10mm BOTTOM CONTACT
NON PUSH
90°SMT

DESCRIPTION: Micro SD Socket Push-Pull Type

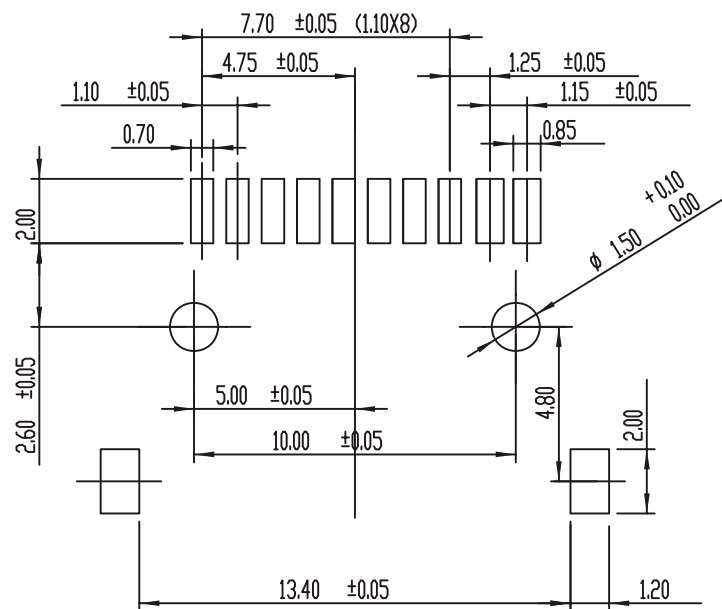

Pin Assignment:	
#1	DTA2
#2	CD/DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1

PCB LAYOUT FOR Multi Slot Card Reader

CIRCUIT:

