
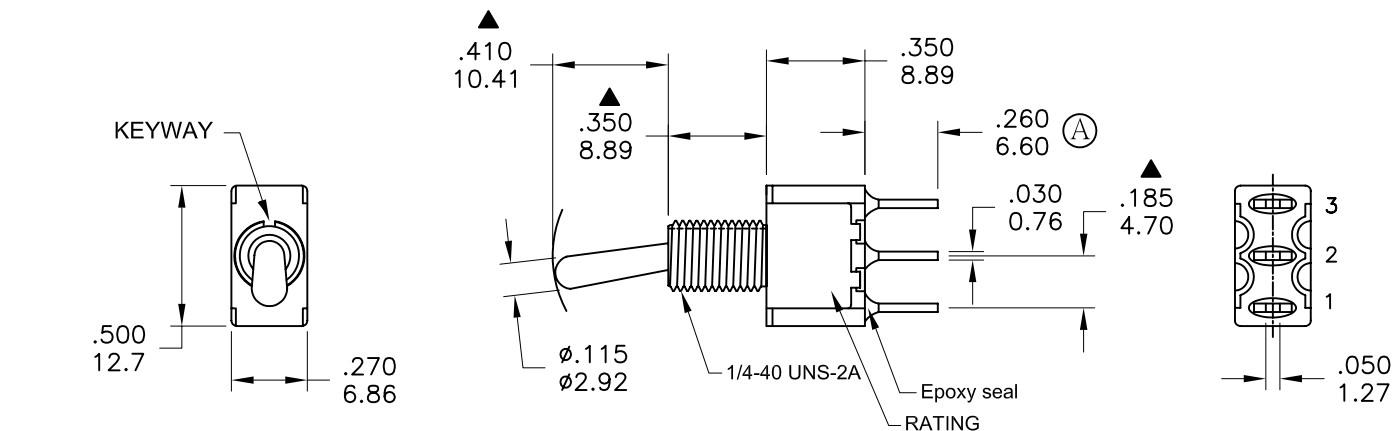


PANEL MOUNTING



P.C. MOUNTING

Model No.	POS.1	POS.2	POS.3
1MS3	ON	OFF	ON
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC	1 2 Comm. 3		1 2 Comm. 3

SWITCH FUNCTION

(A)	MATERIAL NO.	PART NAME	Q'TY
1	N	1/4 INCH NUTS	2
2	T	LOCKING RING	1
3	W	LOCKING WASHER	1

FILE NAME: HARDWARE-0002

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC

100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000MΩ min.

DIELECTRIC STRENGTH: 1,000 V RMS@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).

ACTUATOR: Brass,chrome plated.

BUSHING: Brass,nickel plated.

HOUSING: Stainless Steel.

SWITCH SUPPORT: Brass,tin plated.

TERMINAL/CONTACT: Silver or gold plated.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)

Q : 2Amps @250VAC

5Amps @120 VAC or 28 VDC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

TGSW47-DPB104NWT-1X03-LF

SERIES

LEADFREE

03 WAY


NUT+WASHER+TAG

10.41mm


PANEL BACK

DIP 180°


DESCRIPTION: Miniature Toggle Switches

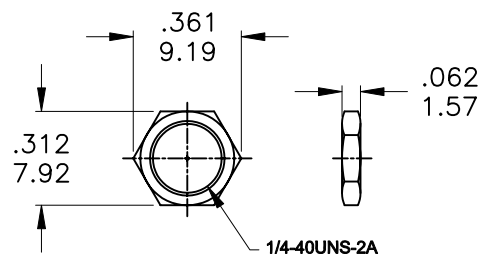

N

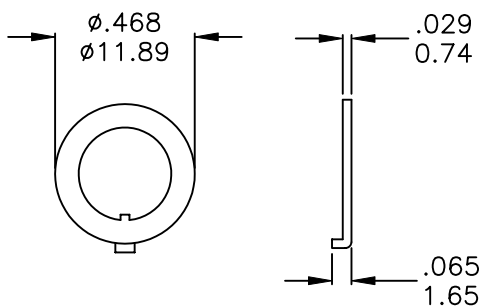

T

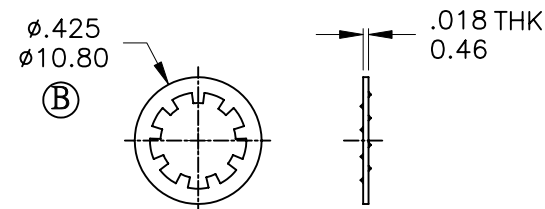

W

	PART NO.	PART NAME	Q'TY
1	N	1/4 INCH NUTS	2
2	T	LOCKING RING	1
3	W	LOCKING WASHER	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

TGSW47-DPB104NWT-1X03-LF

SERIES

LEADFREE

03 WAY

NUT+WASHER+TAG

10.41mm

PANEL BACK

DIP 180°

DESCRIPTION: Miniature Toggle Switches