
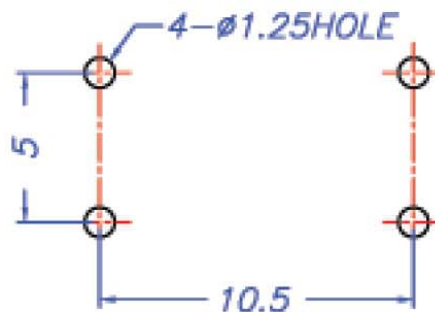


**SPECIFICATIONS:**

1. Rating :DC 12V 50mA
2. Travel :0.3+0.1mm-0.05mm
3. Operating : 160±30gf
4. Contact Resistance :100mΩ Max.
5. Life:100,000 Cycles Min.

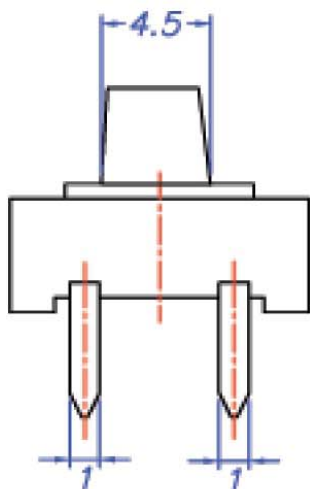

NO.	TITLE	MATERIAL
1	TERMINAL	BRASS COPPER
2	HOUSING	NYLON66+15%GP
3	MOVABLE BLADE	PBS+AG
4	STEM	POM

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±

SIZE A4

P PROJECTION

照片框

**ORDER INFORMATION**

TSW1010-DQ073-160-LF

SERIES

LEADFREE

160g

HIGH 7.3mm

4 PIN

DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: