

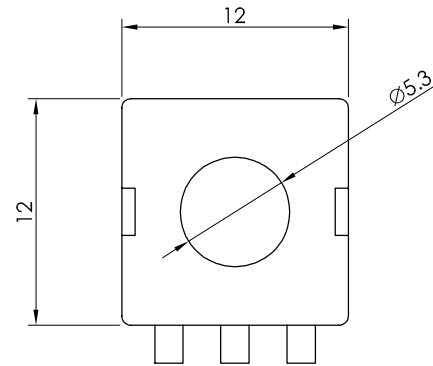



P.C.B. LAYOUT



CIRCUIT DIAGRAM



SPECIFICATION

Rating: 1A 30V DC.

Function: ON(P-6)-ON(P-1).

Total travel: 1.5±0.3mm.

Contact resistance: 100mΩ Max.(initial)

Insulation resistance: 100MΩ Min. at 500V DC.

Withstand voltage: 1,000V AC for 1 minute.

Operating force: 700±150g.



Minimum load: 100mA 10V DC.(reference only)

Life cycle: 20,000 Cycles Min .

Soldering temperature: 250°C Max. for 3 Sec.

Soldering time: 1 time only.

Note: Unwashable, don't be immersed by epoxy and organic solvent.

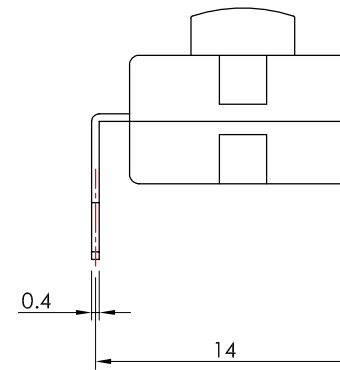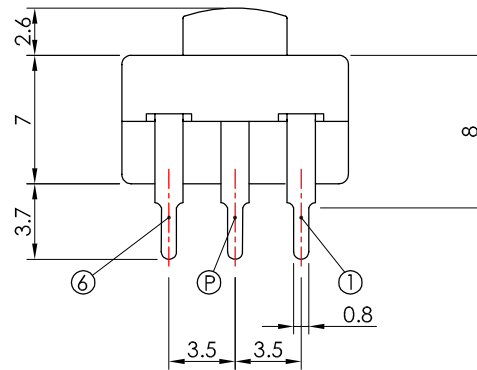

CAP COLOR	
RD	Red
YL	Yellow
GR	Green
BK	Black
BL	Blue
WH	White
GY	Gray

MATERIAL

Frame: Nylon66, UL rated: 94V-2 Min.

Cap: POM.

Terminal: Brass, Silver plated.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

TSW1212-DA106xx-700-LF

SERIES

DIP 180°

700g
RD:RED
GY:GRAY
HIGH 10.6mm
SINGLE ROW

LEADFREE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com