
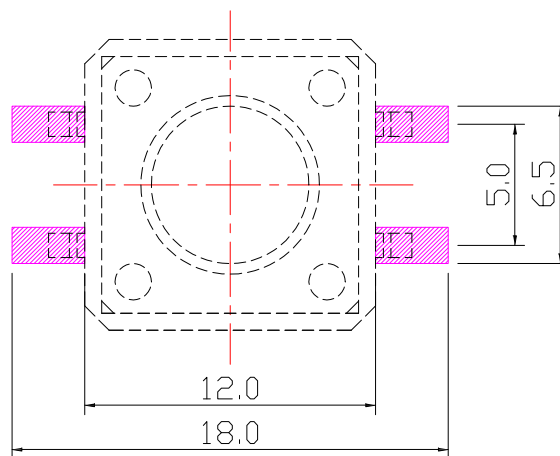
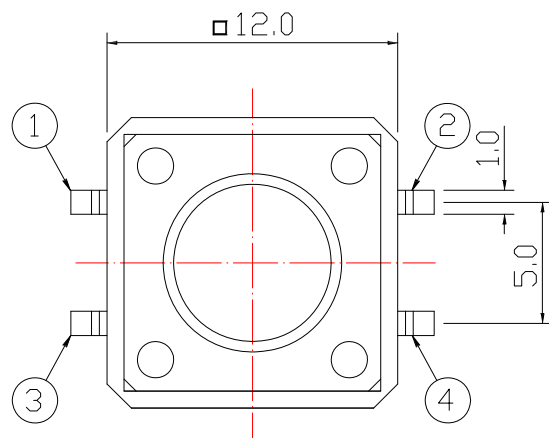


CIRCUIT DIAGRAM



PCB LAYOUT MOUNTING PATTERN

MODEL NO.	043	075	095	12.0
L (mm)	4.3	7.5	9.5	12.0
ØA (mm)	6.8	6.7	6.6	6.0

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.30 ± 0.15mm		
Operating Force	2	160±50gf	3 250±50gf
Operating Life(cycles)	100,000		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

TSW1212-Vxxx-xxx-LF

SERIES

180°SMT
043:HIGH 4.3mm
075:HIGH 7.5mm
095:HIGH 9.5mm
120:HIGH 12.0mm

LEADFREE

160:160g
250:250g

DESCRIPTION: TACT SWITCH