

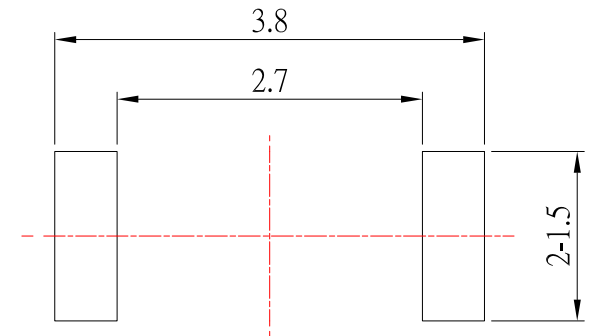
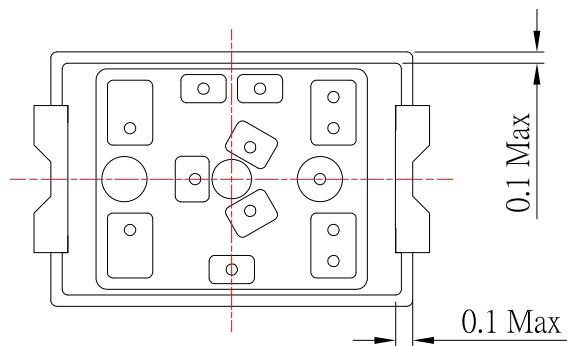


CIRCUIT DIAGRAM

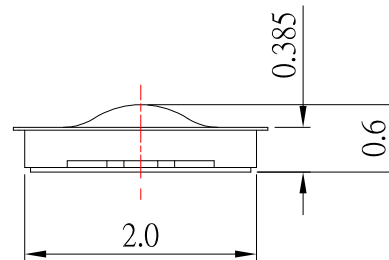

P.C.B LAYOUT MOUNTING PATTERN

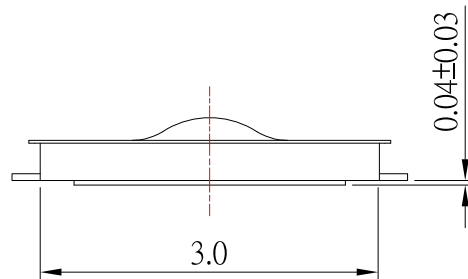

SPECIFICATIONS

Rating	DC 15V 20mA	
Contact Resistance	500mΩ Max.	
Travel	0.13 ± 0.1mm	
Operating Force	240 ± 70gf	330 ± 70gf
Operating Life (cycles)	500,000	300,000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

TSW23-V06-xxx-LF

SERIES

LEADFREE

240:240g

330:330g

HIGH 0.60mm

180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: TACT SWITCH(内置按钮)for Waterproof