
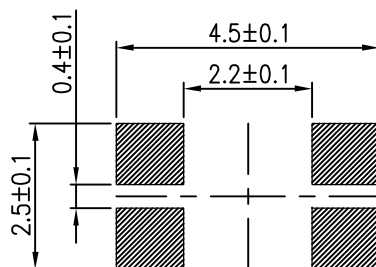


CIRCUIT DIAGRAM



Recommended P.C.B Layout  
Solder thickness  $t=0.12^{+0.03}_{-0.02}$

NOTE: 1.ALL DIMENSIONS ARE IN MILLIMETERS.  
2.GENERAL TOLERANCES MAX.±0.20mm.

SPECIFICATIONS:

- 1.Rating :50mA,DC 12V
- 2.Contact Resistance :100mΩ Max.
- 3.Insulation Resistance :DC 100V 100MΩ
- 4.Dielectric Strength :AC 250V 1 minute
- 5.Operating Temperature Range:-40~85°C  
Storage Temperature Range:-40~85°C

Part No.	Operating Force	Life
TSW23-V17J-100	100±50gf	1,000,000 CYCLES
TSW23-V17J-160	160±50gf	200,000 CYCLES
TSW23-V17J-240	240±80gf	
TSW23-V17J-350	350±100gf	

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

TSW23-V17J-xxx-LF  
SERIES | LEADFREE  
100:100g  
350:350g  
180°SMT J FOOT  
HIGH 1.7mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: